RNAV (GPS) RWY 5

BESSEMER (EKY)

WAAS	APP CRS		
CH 65999	053°	Rwy Idg	6007
W05A		TDZE	700
		Apt Elev	700

T NA Baro-VNAV NA when using Alabaster altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Alabaster altimeter setting and increase all DA 41 feet and all MDA 60 feet. Increase LNAV Cat C and D visibility ¼ mile.

MISSED APPROACH: Climb to 4000 direct IKIMY and on track 108° to HANDE and hold.

AWOS-3PT	BIRMINGHAM APP CON	CLNC DEL	UNICOM
118.825	124.9 351.85	123.75	123.0 (CTAF) L

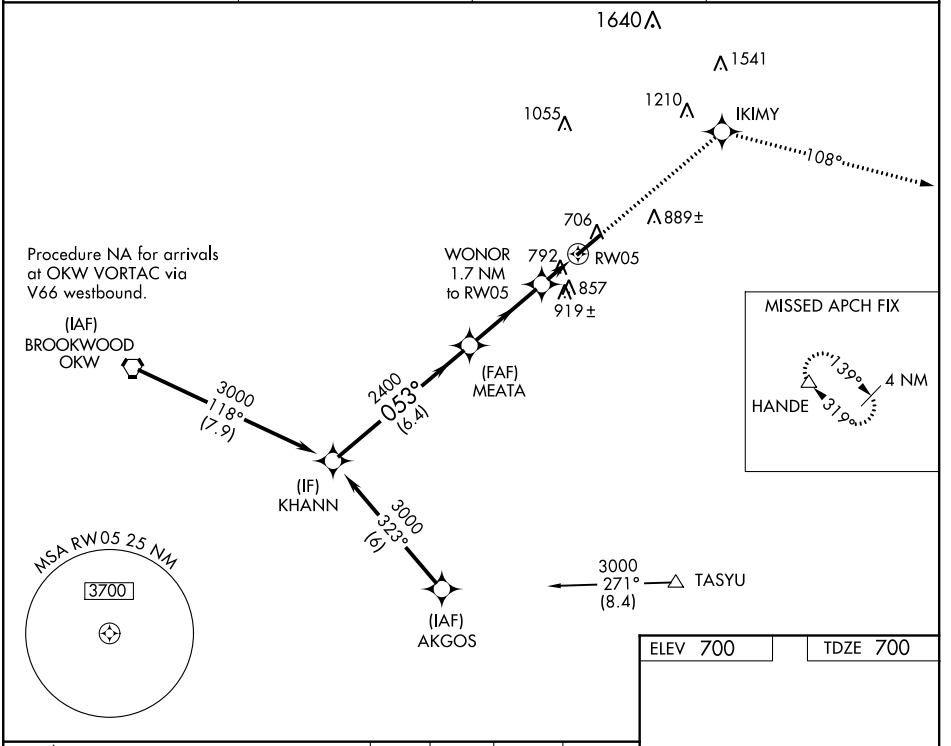

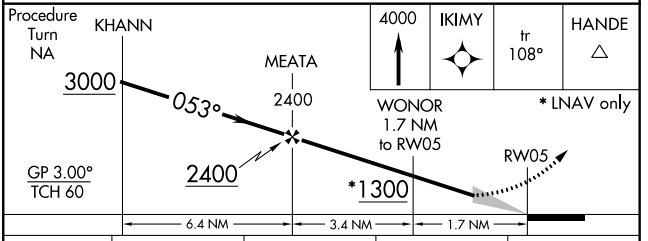

CATEGORY	A	B	C	D
LPV DA	900-¾ 200 (200-¾)			
LNAV/VNAV DA	1244-2 544 (600-2)			
LNAV MDA	1160-1 460 (500-1)		1160-1¼ 460 (500-1¼)	1160-1½ 460 (500-1½)
CIRCLING	1200-1 500 (500-1)		1220-1½ 520 (600-1½)	1260-2 560 (600-2)

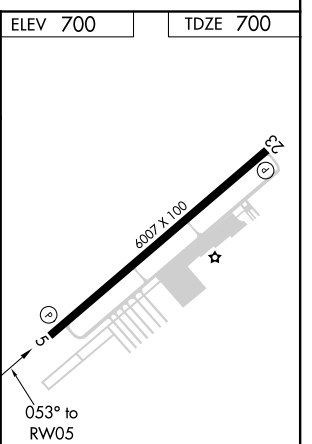

HIRL Rwy 5-23 L
REIL Rwys 5 and 23 L

SE-4, 03 DEC 2020 to 31 DEC 2020
SE-4, 03 DEC 2020 to 31 DEC 2020