

WAAS CH 78438 W28A	APP CRS 280°	Rwy Idg TDZE 197 Apt Elev 197
--	------------------------	---

RNAV (GPS) RWY 28

METTER MUNI (MHP)


▼

▲NA

Baro-VNAV NA. DME/DME RNP-0.3 NA. Helicopter visibility reduction below 1 SM NA. Use Claxton altimeter setting; when not received, use Vidalia altimeter setting and increase LPV DA to 500, LNAV/VNAV DA to 533, increase all MDA 20 feet, increase LNAV/VNAV all Cats and LNAV Cat C/D visibility 1/8 mile and Circling Cat C/D visibility 1/4 mile.

MISSED APPROACH: Climb to 700 then climbing left turn to 3000 direct LOTS and hold.

AWOS-3PT 120.3	CWV AWOS-3 120.075	JACKSONVILLE CENTER 132.925 363.2	UNICOM 123.0 (CTAF) 0
--------------------------	------------------------------	---	--

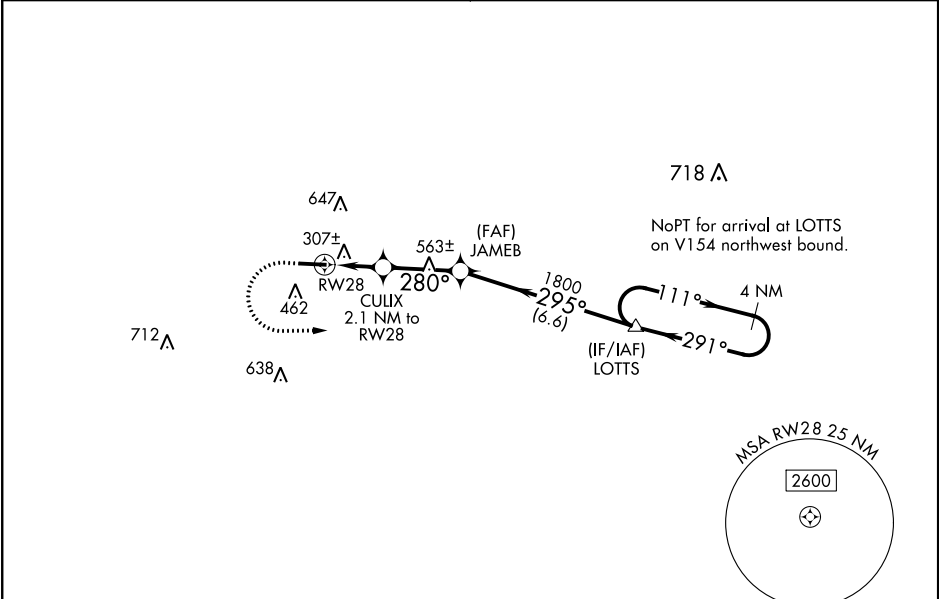

ELEV 197 TDZE 197

MIRL Rwy 10-28 **0**
REIL Rwy 10 **0**

700 3000 LOTS △	VGSi and RNAV glidepath not coincident (VGSi Angle 3.00/TCH 27).			
*LNAV only.				
	2.1 NM	2.8 NM	6.6 NM	
CATEGORY	A	B	C	D
LPV DA	494-1 297 (300-1)			
LNAV/VNAV DA	527-1 330 (400-1)			
LNAV MDA	620-1	423 (500-1)	620-1 1/4	423 (500-1 1/4)
C CIRCLING	820-1 623 (700-1)	880-1 683 (700-1)	1060-2 1/2 863 (900-2 1/2)	1060-2 3/4 863 (900-2 3/4)