

WAAS  
CH **99511**  
**W31A**

APP CRS  
**311°**

Rwy Idg  
TDZE **1283**  
Apt Elev **1289**

**RNAV (GPS) RWY 31**

PAULDING NORTHWEST ATLANTA (PUJ)

▼


▲

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C (2°F) or above 46°C (114°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Cartersville altimeter setting and increase all DA 106 feet and all MDA 120 feet and LPV all Cats and LNAV/VNAV all Cats and LNAV Cat C/D visibilities ¼ mile and Circling Cat C/D visibilities ½ mile. Baro-VNAV and VDP NA when using Cartersville altimeter setting.


MISSED APPROACH:  
Climb to 3000 direct YOBUY and hold.

AWOS-3 <b>126.225</b>	ATLANTA APP CON <b>121.0 268.7</b>	UNICOM <b>123.075 (CTAF) 0</b>
--------------------------	---------------------------------------	-----------------------------------

RADAR REQUIRED

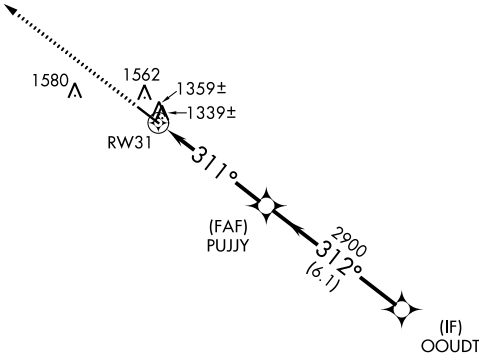

ELEV 1289	TDZE 1283
-----------	-----------

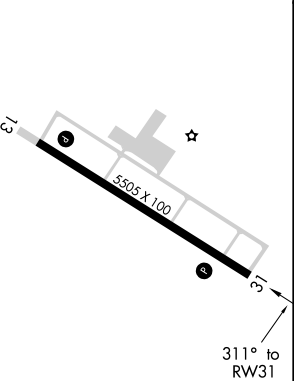

3000 ↑	YOBUY ✦			
*LNAV only.				
RW31 ↙	*1.2 NM to RW31 ↓	PUJY 2900 ✕	312°	3000 ↑
1.2 NM		3.6 NM	6.1 NM	GP 3.00° TCH 48
CATEGORY	A	B	C	D
LPV DA	1483-¾ 200 (200-¾)			
LNAV/DA VNAV	1635-1¼ 352 (400-1¼)			
LNAV MDA	1720-1	437 (500-1)	1720-1½ 437 (500-1½)	1720-1½ 437 (500-1½)
CIRCLING	1880-1	591 (600-1)	1880-1½ 591 (600-1½)	1940-2 651 (700-2)