

LOC I-CVN 108.9	APP CRS 037°	Rwy Idg TDZE Apt Elev	7200 4205 4216
---------------------------	------------------------	-----------------------------	---

ILS or LOC RWY 4

CLOVIS MUNI (CVN)

▼


NA

When local altimeter setting not received, use Cannon AFB altimeter setting and increase all DA and MDA 40 feet. For inop MALSRL, increase S-LOC 4 Cat C/D visibility to 1 3/8 mile. For inop MALSRL when using Cannon AFB, increase S-LOC 4 Cat C/D visibility to 1 3/8 mile.

MALSRL

MISSED APPROACH: Climb to 4700 then climbing right turn to 6000 direct TXO VORTAC and hold.

AWOS-3PT 135.375	CANNON APP CON 118.425 352.1	CLNC DEL 119.0	UNICOM 122.8 (CTAF)
----------------------------	--	--------------------------	-------------------------------

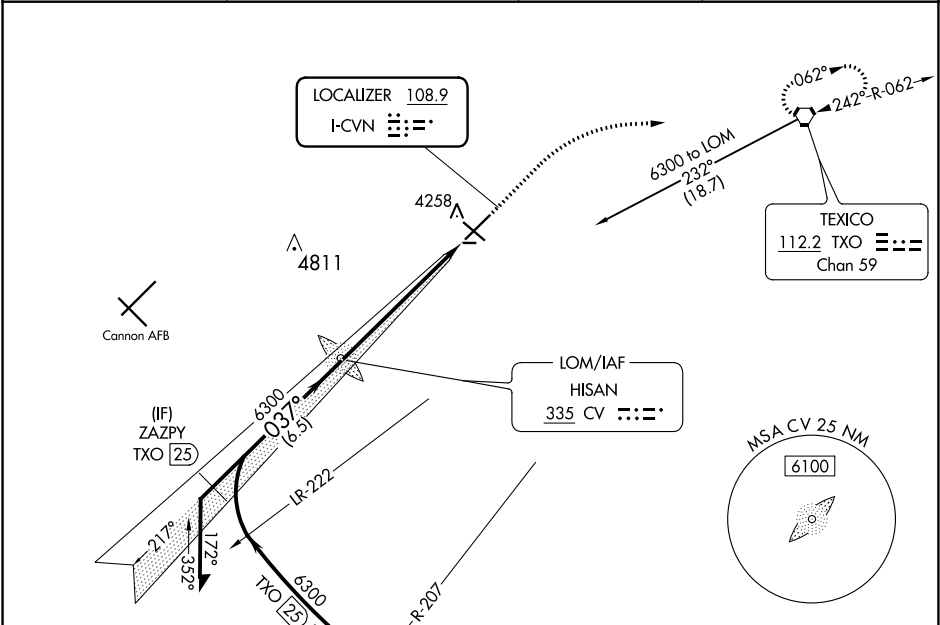

ELEV 4216		TDZE 4205	
GS 3.00° TCH 53		REIL Rwy 12 and 30 MIRL Rwy 4-22 and 12-30	
CATEGORY		FAF to MAP 6.2 NM	
S-ILS 4		4405-1/2 200 (200-1/2)	
S-LOC 4		4680-1/2 475 (500-1/2) 4680-1 475 (500-1)	
CIRCLING		4680-1 464 (500-1) 4700-1/2 484 (500-1/2) 4820-2 604 (700-2)	
Knots		60 90 120 150 180	
Min:Sec		6:12 4:08 3:06 2:29 2:04	