
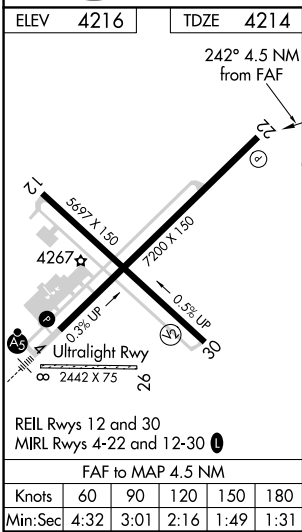


VORTAC TXO	APP CRS	Rwy Idg	7200
112.2	242°	TDZE	4214
Chan 59		Apt Elev	4216

VOR RWY 22
CLOVIS MUNI (CVN)

<p>⚠ DME or Radar required. When local altimeter setting not received, use Cannon AFB altimeter setting and increase all MDA 40 feet; increase S-22 Cat C/D visibility ½ mile. VDP NA when using Cannon AFB altimeter setting.</p>	<p>MISSED APPROACH: Climb to 4700 then climbing right turn to 6000 direct TXO VORTAC and hold.</p>
---	---

AWOS-3PT 135.375	CANNON APP CON 118.425 352.1	CLNC DEL 119.0	UNICOM 122.8 (CTAF) 📻
---------------------	---------------------------------	-------------------	---------------------------------

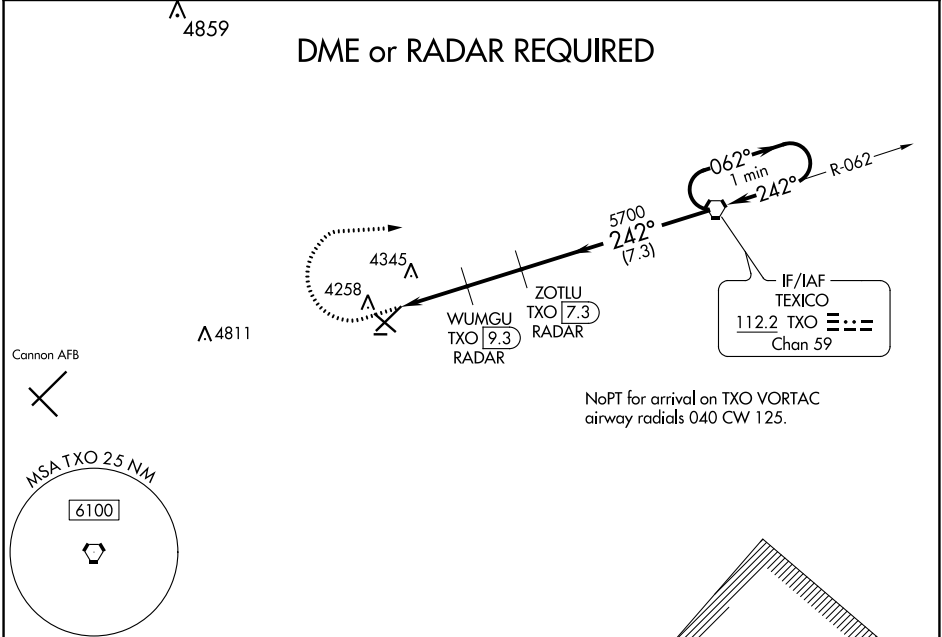

<p>BRONCO 1 MOA</p>				
4700 ↑	6000 ↻	TXO ⬢	One Minute Holding Pattern	
<p>WUMGU TXO 9.3 RADAR</p> <p>ZOTLU TXO 7.3 RADAR</p> <p>TXO 11.8</p> <p>TXO 10.8</p> <p>2.99° TCH 47°</p> <p>5040</p> <p>5700</p> <p>TXO VORTAC</p> <p>062° → 6000</p> <p>← 242°</p> <p>242°</p> <p>1 1.5 2 NM 7.3 NM</p>				
CATEGORY	A	B	C	D
S-22	4600-1	386 (400-1)	4600-1½	386 (400-1½)
CIRCLING	4680-1	464 (500-1)	4700-1½ 484 (500-½)	4820-2 604 (700-2)