

WAAS CH 93529 W17B	APP CRS 173°	Rwy Idg 12000 TDZE 5392 Apt Elev 5434
--	------------------------	--

RNAV (GPS) Y RWY 17R

DENVER INTL (DEN)

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -25°C (-13°F) or above 46°C (116°F). Simultaneous approach authorized with Rwy 16L/16R and 17L. DME/DME RNP-0.3 NA. For inoperative MALSR, increase LNAV/VNAV all Cats visibility to 1½ mile, and LNAV Cat C/D to 1½ mile. LNAV procedure NA during simultaneous operations. Use of FD or AP providing RNAV track guidance required during simultaneous operations.





MALSR

MISSED APPROACH: Climb to 10000 direct JAKUR and on track 200° to HOHUM and hold.

D-ATIS ARR 125.6 379.9 DEP 134.025	DENVER APP CON 119.3 307.3 120.35 379.3 (NORTH) (SOUTH)	DENVER TOWER 133.3 322.45	GND CON 121.85 377.1	CLNC DEL 118.75	CPDLC
--	--	-------------------------------------	--------------------------------	---------------------------	-------

RADAR REQUIRED

Λ 6260

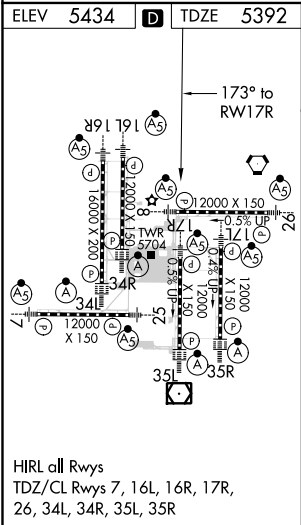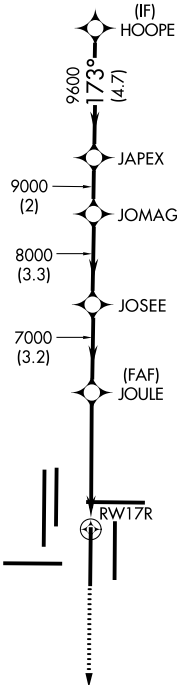

10000 ↑	JAKUR ✧	tr 200°	HOHUM △	VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 69°).				
*LNAV only				JOULE 7000	JOSEE 8000	JOMAG 9000	JAPEX 9600	HOPE 11000
*1.6 NM to RW17R				7000	7000	8000	9000	9600
RW17R				173°	173°			
1.6				3.3 NM	3.2 NM	3.3 NM	2 NM	4.7 NM
CATEGORY				A	B	C	D	
LPV DA		5592/18 200 (200-½)						
LNAV/VNAV DA		5857/60 465 (500-1¼)						
LNAV MDA		5940/24 548 (600-½)			5940-1¼ 548 (600-1¼)			