| WAAS CH **69201** **W30A** | APP CRS **297°** | Rwy Idg **3740** TDZE **193** Apt Elev **193** |
|---|---|---|

# RNAV (GPS) RWY 30

TRACY MUNI (TCY)

RNP APCH

Baro-VNAV NA when using Stockton altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C. Circling NA southwest of Rwy 12-30. Straight-In Rwy 30 NA at night, Circling Rwy 30 NA at night. Rwy 30 helicopter visibility reduction below 1 SM NA. When local altimeter setting not received, use Stockton altimeter setting; increase all DAs to 507 feet; increase all MDAs 60 feet and visibility LNAV Cat C ⅛ SM.

MISSED APPROACH: Climb to 700 then climbing right turn to 3200 direct HAIRE and hold, continue climb-in-hold to 3200.

| AWOS-3 | NORCAL APP CON | UNICOM |
|---|---|---|
| **118.375** | **123.85 278.3** | **123.075** (CTAF) L |

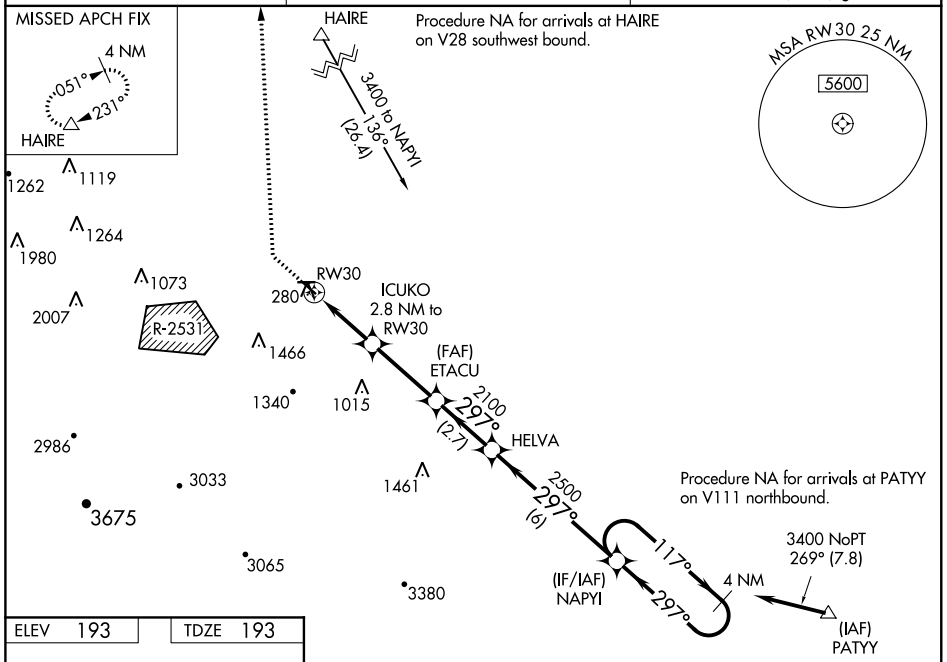


ELEV 193 TDZE 193




MIRL Rwys 8-26 and 12-30 L

REIL Rwys 8, 12, 26 and 30 L

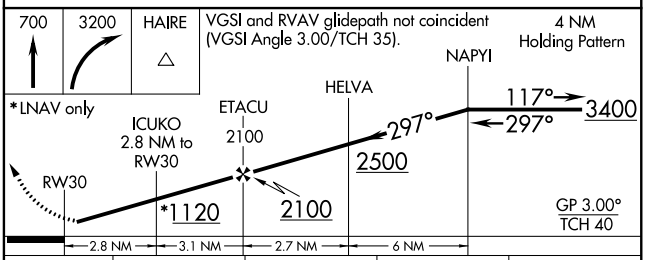


| CATEGORY | A | B | C | D |
|---|---|---|---|---|
| LPV DA | 447-1 | 254 (300-1) | | NA |
| LNAV/VNAV DA | 443-1 | 250 (300-1) | | NA |
| LNAV MDA | 540-1 | 347 (400-1) | | NA |
| C CIRCLING | 580-1<br>387 (400-1) | 660-1<br>467 (500-1) | 660-1½<br>467 (500-1½) | NA |



SW-2, 03 DEC 2020 to 31 DEC 2020
SW-2, 03 DEC 2020 to 31 DEC 2020