
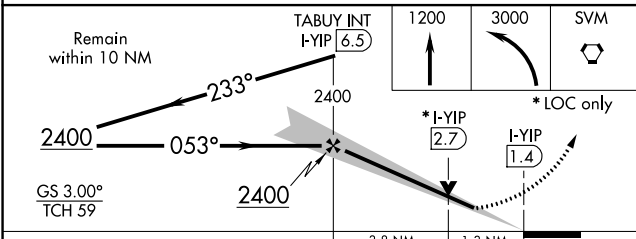


LOC/DME I-YIP	APP CRS	Rwy Idg	5R	5L
109.5	053°	7543	5996	
Chan 32		TDZE	716	716
		Apt Elev	716	716

ILS or LOC RWY 5R
WILLOW RUN (YIP)

 Circling to Rwy 9 NA at night. For inop ALS, increase S-LOC 5R Cat C/D visibility to 1 1/2 SM.	MALSR 	MISSED APPROACH: Climb to 1200 then climbing left turn to 3000 direct SVM VORTAC and hold.
---	---	---

ATIS 127.425	DETROIT APP CON 118.95 284.0	WILLOW RUN TOWER 125.275 256.9	GND CON 119.975
------------------------	--	--	---------------------------

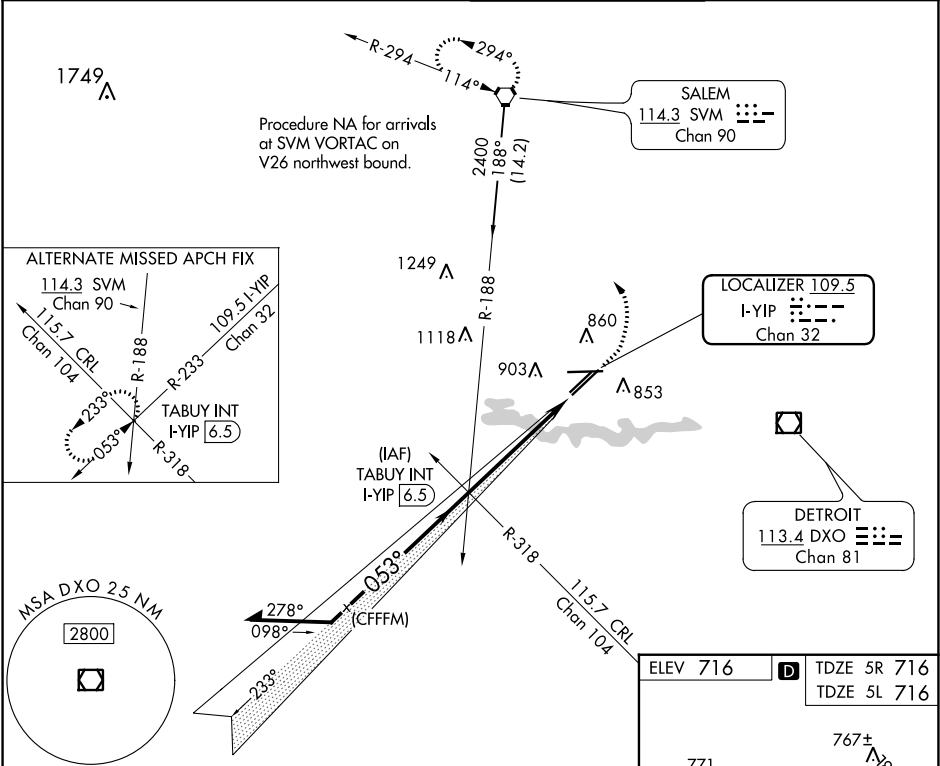

CATEGORY	A	B	C	D
S-ILS 5R		916/18	200 (200-1/2)	
S-LOC 5R	1200/24	484 (500-1/2)	1200/50	484 (500-1)
SIDESTEP RWY 5L	1240-1	524 (600-1)	1240-1 1/2	1240-2
			524 (600-1 1/2)	524 (600-2)
CIRCLING	1220-1	504 (600-1)	1220-1 1/2	1400-2 1/4
			504 (600-1 1/2)	684 (700-2 1/4)

