WAAS	APP CRS	Rwy Idg	7543
CH 81910	233°	TDZE	710
W23A		Apt Elev	716

RNAV (GPS) RWY 23L

WILLOW RUN (YIP)

T A Inoperative table does not apply to LPV. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -19°C (-2°F) or above 54°C (130°F). For inop MALSR, increase visibility LNAV/VNAV all Cats to ⅞ mile and LNAV Cat A/B to 1 mile, Cat C/D to 1⅛ mile. DME/DME RNP-0.3 NA. Helicopter visibility reduction below ¾ SM NA.

MALSR (A5)

MISSED APPROACH: Climb to 3000 direct ZAVEX and hold.

ATIS	DETROIT APP CON	WILLOW RUN TOWER	GND CON
127.425	118.95 284.0	125.275 256.9	119.975

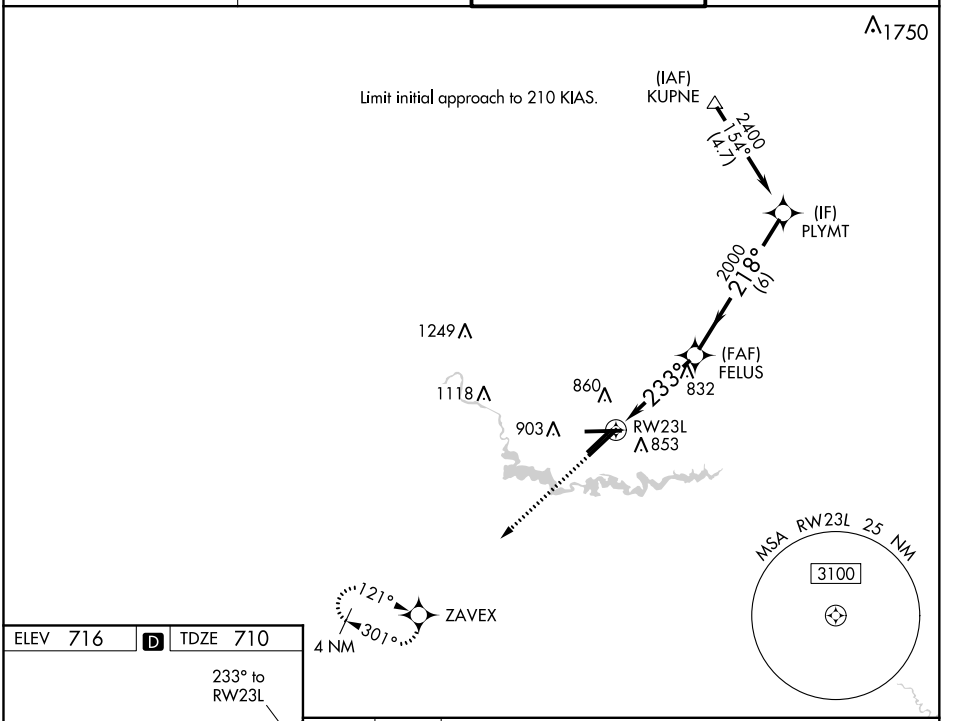

ELEV 716 D TDZE 710



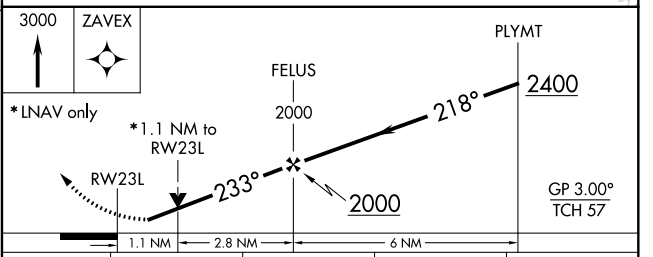

CATEGORY	A	B	C	D
LPV DA	959- ¾ 249 (300-¾)			
LNAV/VNAV DA	974- ¾ 264 (300-¾)			
LNAV MDA	1100- ¾ 390 (400-¾)			
C CIRCLING	1220-1 504 (600-1)		1220-1½ 504 (600-1½)	1400-2¼ 684 (700-2¼)

TDZ/CL Rwy 5R
HIRL Rwy 5R-23L
MIRL Rwys 5L-23R, and 9-27

EC-1, 31 DEC 2020 to 28 JAN 2021
EC-1, 31 DEC 2020 to 28 JAN 2021