WAAS CH 63128 W27A	APP CRS 274°	Rwy Idg 6498 TDZE 596 Apt Elev 609

RNAV (GPS) RWY 27
DELTA COUNTY (ESC)

Baro-VNAV NA when using Marquette altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 54°C (130°F). Rwy 27 Straight-in and Circling and Circling to Rwy 19 NA at night. DME/DME RNP-0.3 NA. Helicopter visibility reduction below 1 SM NA. When local altimeter setting not received, use Marquette altimeter setting and increase all DA 178 feet and all MDA 180 feet and increase LPV all Cats visibility ⅜ mile, LNAV/VNAV all Cats visibility ⅝ mile, LNAV Cat C and D visibility ⅜ mile, and Circling Cat C visibility ½ mile and Cat D visibility ¼ mile.

MISSED APPROACH: Climb to 2500 direct YEBUG and hold.

AWOS-3PT	MINNEAPOLIS CENTER	UNICOM
121.425	127.65	122.8 (CTAF) L

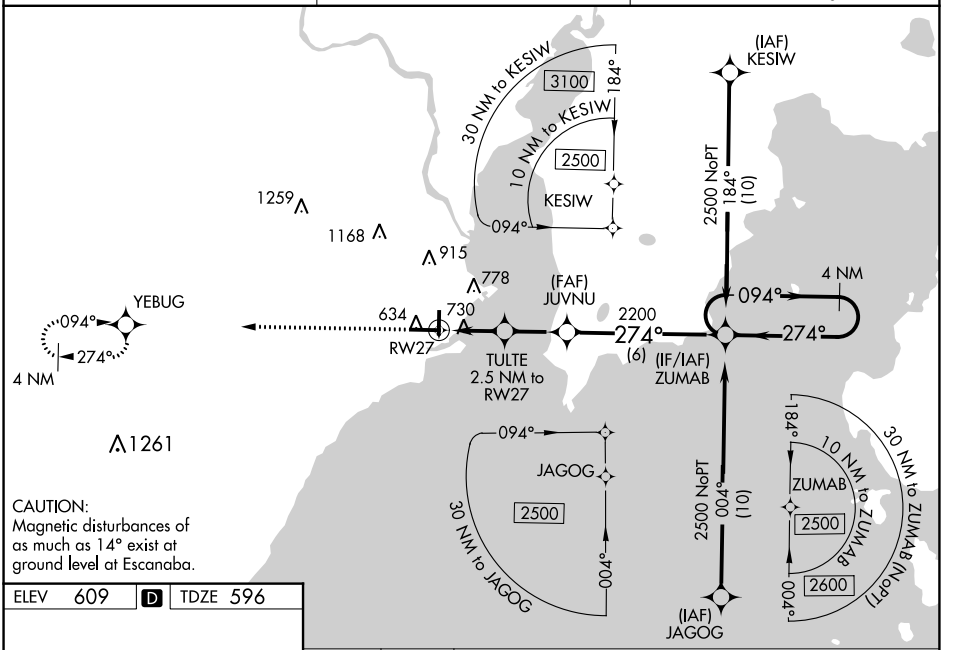

ELEV 609 D TDZE 596



HIRL Rwy 9-27 L
MIRL Rwy 1-19 L
REIL Rwys 1 and 27 L

2500 YEBUG *LNAV only. 4 NM Holding Pattern

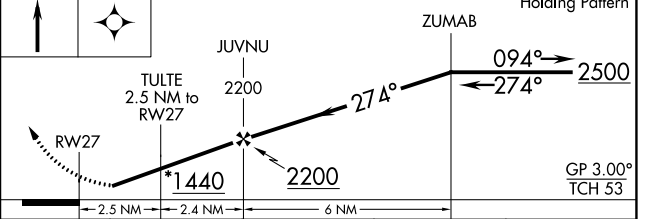

CATEGORY	A	B	C	D
LPV DA	846-1 250 (300-1)			
LNAV/VNAV DA	1076-1⅝ 480 (500-1⅝)			
LNAV MDA	1040-1 444 (500-1)		1040-1⅜ 444 (500-1⅜)	
C CIRCLING	1060-1 451 (500-1)	1080-1 471 (500-1)	1280-2 671 (700-2)	1480-2¾ 871 (900-2¾)

EC-1, 31 DEC 2020 to 28 JAN 2021
EC-1, 31 DEC 2020 to 28 JAN 2021