| WAAS | APP CRS | Rwy Idg 5501 |
|---|---|---|
| CH 60933 | 097° | TDZE 621 |
| W10A | | Apt Elev 621 |

# RNAV (GPS) RWY 10

## MANISTEE COUNTY-BLACKER (MBL)

Night landing Rwy 1/19 NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 54°C (130°F). DME/DME RNP -0.3 NA. Baro-VNAV and VDP NA with Ludington altimeter setting. Helicopter visibility reduction below ¾ SM not authorized. When local altimeter setting not received, use Ludington altimeter setting and increase all DA 50 feet and all MDA 60 feet. Increase LPV visibility all Cats ¼ mile, LNAV/VNAV visibility all Cats ⅛ mile. Increase LNAV Cats C/D visibility ⅛ mile, and Circling Cat C visibility ¼ mile.

MISSED APPROACH: Climb to 3000 direct HALGI and hold.

| AWOS-3PT | MINNEAPOLIS CENTER | UNICOM |
|---|---|---|
| 111.4 | 120.85 322.35 | 122.8 (CTAF) L |

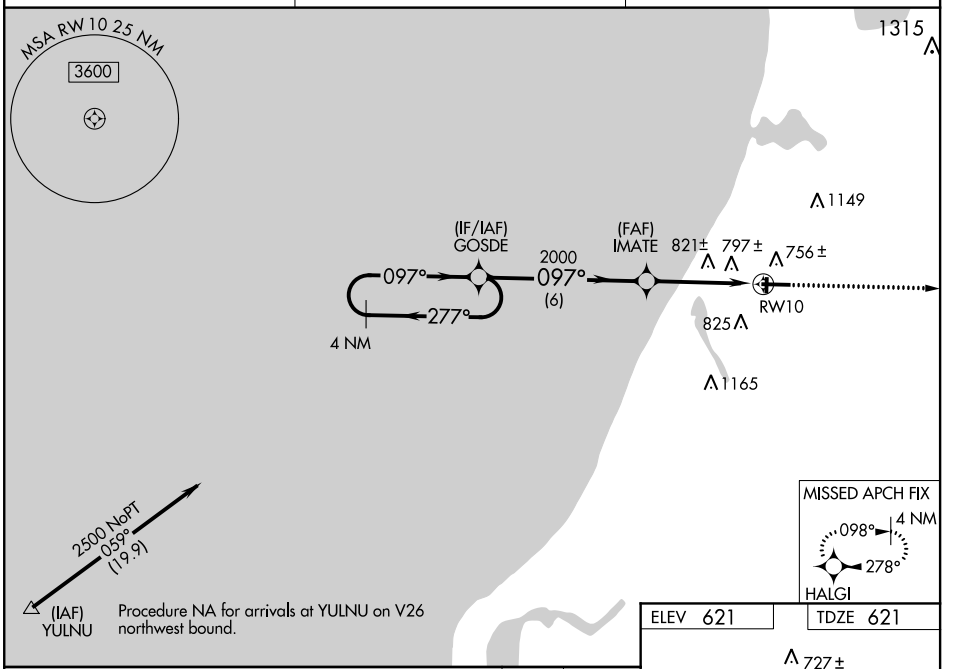


| CATEGORY | A | B | C | D |
|---|---|---|---|---|
| LPV DA | 871-¾ 250 (300-¾) | | | |
| LNAV/VNAV DA | 1091-1⅝ 470 (500-1⅝) | | | |
| LNAV MDA | 1080-1 459 (500-1) | | 1080-1⅜ 459 (500-1⅜) | |
| CIRCLING | 1120-1 499 (500-1) | 1160-1 539 (600-1) | 1200-1½ 579 (600-1½) | 1300-2¼ 679 (700-2¼) |

HIRL Rwys 10-28 L
MIRL Rwys 1-19 L
REIL Rwys 10 L



EC-1, 31 DEC 2020 to 28 JAN 2021
EC-1, 31 DEC 2020 to 28 JAN 2021