WAAS	APP CRS	Rwy ldg	4300
CH 56238	275°	TDZE	976
W27A		Apt Elev	990

RNAV (GPS) RWY 27

ROBEN-HOOD (RQB)

For uncompensated Baro-VNAV systems, procedure NA below -16°C (4°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. Night landing: Rwy 32 NA. Baro-VNAV and VDP NA when using Muskegon altimeter setting. When local altimeter setting is not received, use Muskegon altimeter setting and increase DA 157 feet and all visibilities ½ mile; increase all MDAs 160 feet, LNAV Cat C/D visibility and Circling Cat C ½ and Circling Cat D visibility ¼ mile.

MISSED APPROACH: Climb to 2900 direct HUSHU and hold.

AWOS-3P	MINNEAPOLIS CENTER	UNICOM
125.875	120.85 322.35	122.8 (CTAF) L

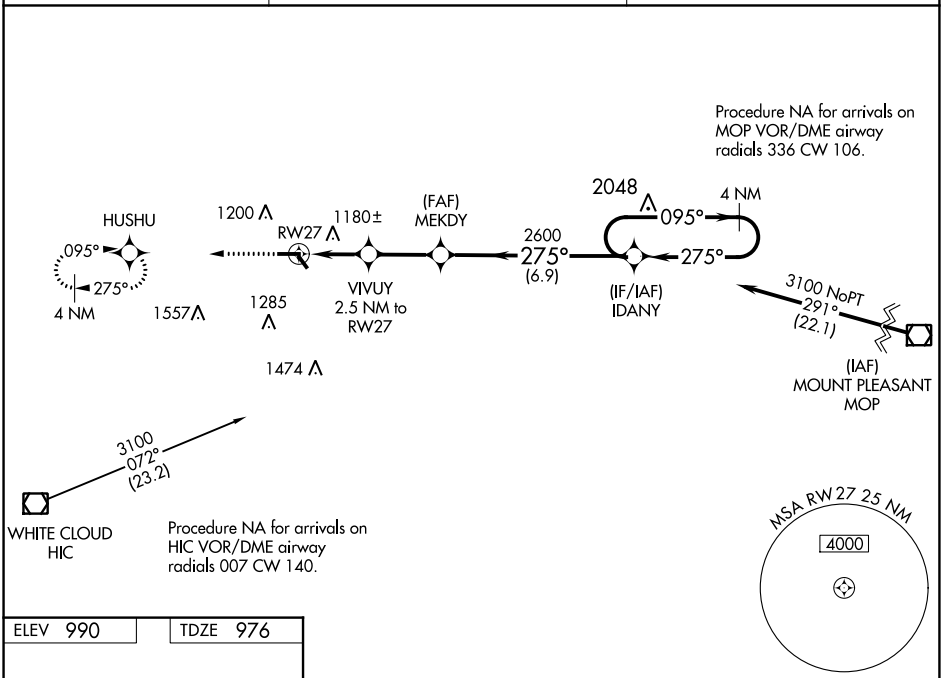

ELEV 990	TDZE 976



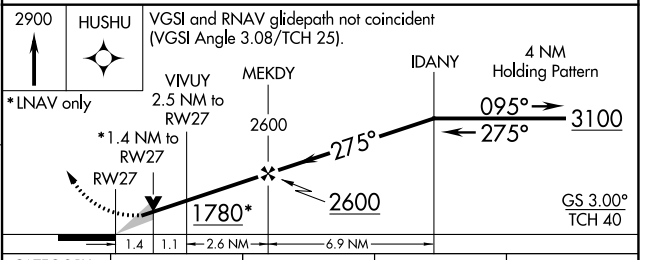

CATEGORY	A	B	C	D
LPV DA	1176-¾ 200 (200-¾)			
LNAV/VNAV DA	1540-2 564 (600-2)			
LNAV MDA	1440-1 464 (500-1)		1440-1¾ 464 (500-1¾)	
C CIRCLING	1500-1 510 (600-1)	1560-1 570 (600-1)	1700-2 710 (800-2)	1860-2¾ 870 (900-2¾)

REIL Rwys 9 and 27 L
MIRL Rwys 9-27 and 14-32 L

EC-1, 31 DEC 2020 to 28 JAN 2021
EC-1, 31 DEC 2020 to 28 JAN 2021