ROCKT ONE DEPARTURE (RNAV)

(ROCKT1.ROCKT) 15AUG19

CINCINNATI MUNI AIRPORT LUNKEN FIELD (LUK)

CINCINNATI, OHIO

ATIS 120.25
LUNKEN TOWER ★
118.7 (CTAF) 257.8
GND CON
121.9
CLNC DEL
121.9
CLNC DEL
124.9 (When twr closed)
CINCINNATI DEP CON
121.0 254.25

TAKEOFF MINIMUMS

Rwy 3L: 400-2 with minimum climb of 226′ per NM to 1300
or standard with minimum climb of 423′ per NM to 1000.
Rwy 3R: 400-2 with minimum climb of 233′ per NM to 1300
or standard with minimum climb of 384′ per NM to 1100.
Rwy 7: 400-1¾ with minimum climb of 279′ per NM to 1000
or standard with minimum climb of 451′ per NM to 1000.
Rwy 21L: 500-2½ with minimum climb of 254′ per NM to 1100
or standard with minimum climb of 439′ per NM to 1000.
Rwy 21R: 500-2¾ with minimum climb of 226′ per NM to 1100
or standard with minimum climb of 489′ per NM to 1100.
Rwy 25: 600-2½ with minimum climb of 268′ per NM to 1100.

TOP ALTITUDE: ASSIGNED BY ATC.

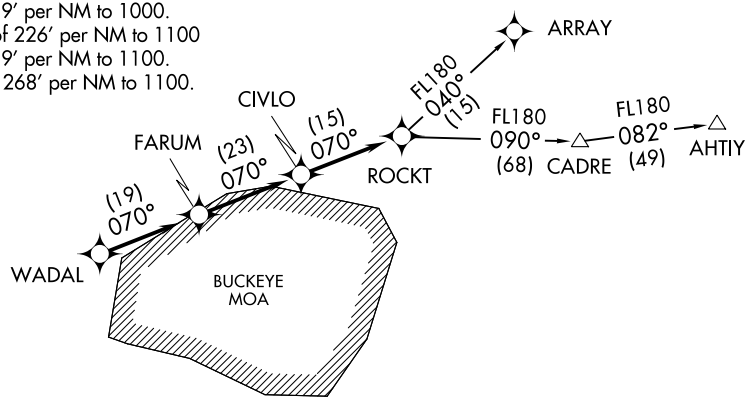

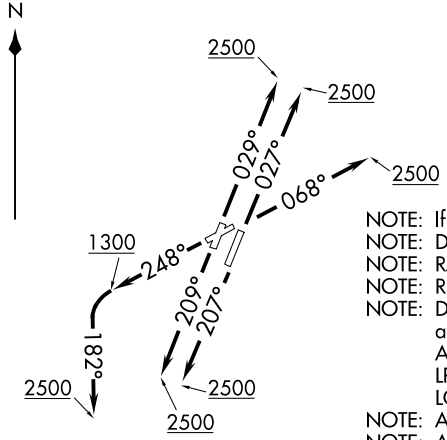

NOTE: If unable to accept climb rates, advise ATC on initial contact.
NOTE: DME/DME/IRU or GPS required.
NOTE: RADAR required.
NOTE: RNAV 1.
NOTE: Departure procedure limited to aircraft with the following destination airports and departure times as indicated:
Anytime - ABE, AGC, ALB, AVP, BDL, BKL, BOS, BWI, CAK, CGF, CLE, LNN, LPR, MDT, MHT, PHL, PIT, PNE, PVD, PWM, SWF, TTN, UNV, and overseas flights.
LGA between 1000-1800 UTC.
NOTE: ARRAY TRANSITION (ROCKT1.ARRAY) limited to aircraft landing: BKL, CAK, CLE, CGF, LNN, LPR.
NOTE: Accelerate to 250K, if unable advise ATC.

NOTE: Chart not to scale.

(NARRATIVE ON FOLLOWING PAGE)

ROCKT ONE DEPARTURE (RNAV)
(ROCKT1.ROCKT) 19339
CINCINNATI MUNI AIRPORT LUNKEN FIELD (LUK)
AL-83 (FAA)
CINCINNATI, OHIO