RNAV (GPS) Y RWY 28R

JOHN GLENN COLUMBUS INTL (CMH)

WAAS	APP CRS	Rwy Idg	8000
CH 86619	281°	TDZE	813
W28B		Apt Elev	815

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -18°C (0°F) or above 54°C (130°F). Simultaneous approach authorized. DME/DME RNP-0.3 NA. LNAV procedure NA during simultaneous operations. Use of FD or AP providing RNAV track guidance required during simultaneous operations. For inoperative ALS, increase LNAV/VNAV all Cats visibility to RVR 4500; increase LNAV Cat C/D visibility to 1⅜ SM.

MALSR

MISSED APPROACH: Climb to 2800 direct ALEME and hold.

D-ATIS	COLUMBUS APP CON	COLUMBUS TOWER	GND CON	CLNC DEL	CPDLC
124.6	125.95 371.975	132.7 257.8	121.9 348.6	126.3	

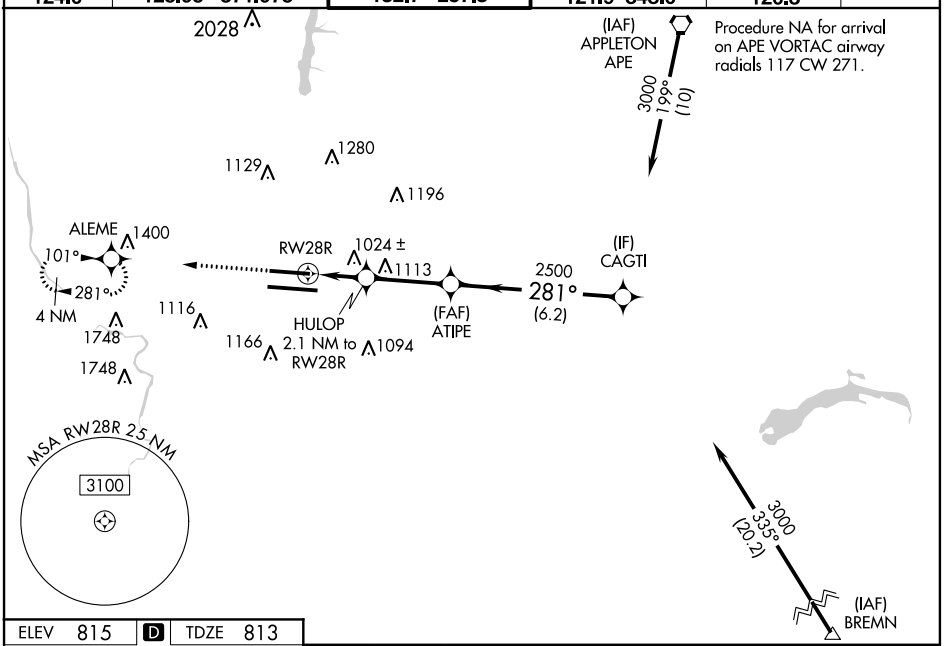

ELEV 815 D TDZE 813



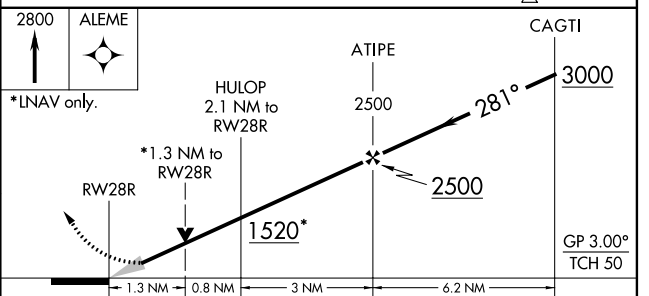

CATEGORY	A	B	C	D
LPV DA	1018/24 205 (300-½)			
LNAV/VNAV DA	1122/24 309 (400-½)			
LNAV MDA	1280/24 467 (500-½)		1280/50 467 (500-1)	
C CIRCLING	1340-1 525 (600-1)		1520-2 705 (800-2)	1520-2¼ 705 (800-2¼)

TDZ/CL Rwy 10R-28L
HIRL Rwys 10R-28L and 10L-28R

EC-2, 31 DEC 2020 to 28 JAN 2021
EC-2, 31 DEC 2020 to 28 JAN 2021