
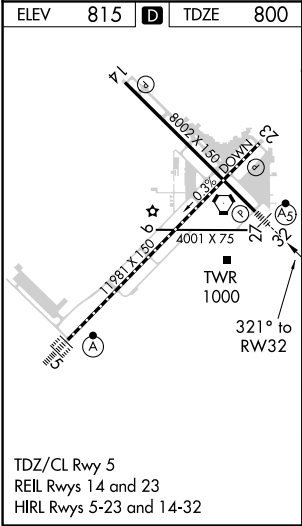


WAAS CH 82417 W32A	APP CRS 321°	Rwy Idg TDZE Apt Elev	8001 800 815
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 32

FORT WAYNE INTL (FWA)

<div><div><div>⚠</div><div>ASR</div></div><div>For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 47°C (116°F). DME/DME RNP-0.3 NA. ** RVR 1800 authorized with use of FD or AP or HUD to DA.</div></div>	<div><div>MALSR</div><div><div>AS</div><div><div></div><div></div><div></div></div></div></div> <div>MISSED APPROACH: Climb to 3000 direct LABIC and hold.</div>			
ATIS 121.25 360.825	FORT WAYNE APP CON 127.2 284.6	FORT WAYNE TOWER 119.1 269.325	GND CON 121.9 348.6	CLNC DEL 124.75

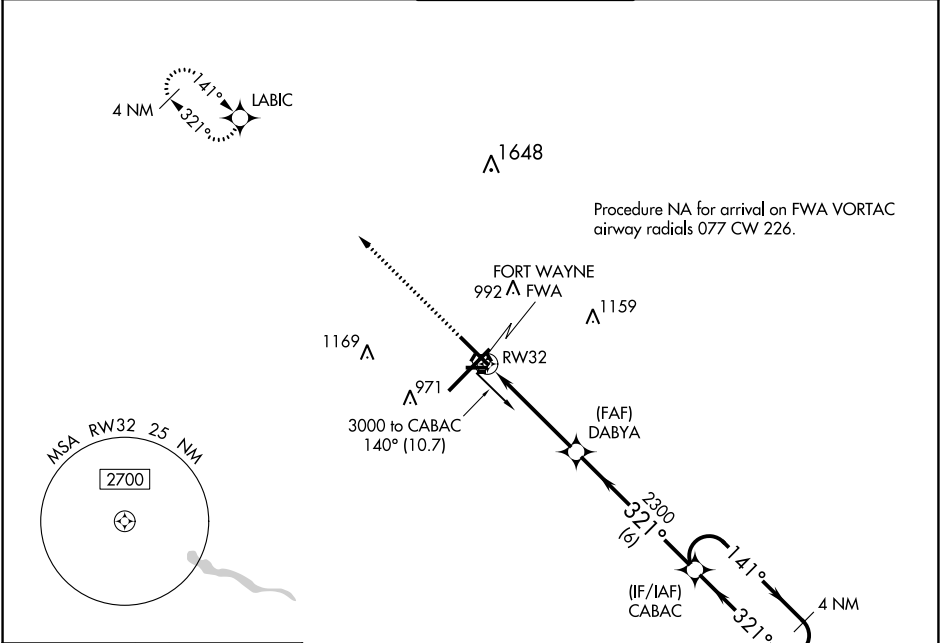

3000	LABIC	VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 76).			
*LNAV only		*1.3 NM to RW32	DABYA 2300	CABAC	4 NM Holding Pattern
		1.3	3.2 NM	6 NM	
			2300		GP 3.00° TCH 56
CATEGORY	A	B	C	D	
LPV DA	**1000/24 200 (200-½)				
LNAV/VNAV DA	1250/50 450 (500-1)				
LNAV MDA	1280/24	480 (500-½)	1280/50	480 (500-1)	
CIRCLING	1300-1	485 (500-1)	1420-1¾ 605 (700-1¾)	1520-2¼ 705 (800-2¼)	