ILS or LOC RWY 27

GOSHEN MUNI (GSH)

LOC I-GSH	APP CRS	Rwy Idg	6050
108.3	273°	TDZE	827
		Apt Elev	827

DME or RADAR required.

When local altimeter setting not received, use Warsaw Muni altimeter setting and increase all DAs/MDAs 40 feet and increase CEDOB Fix Minimums S-LOC 27 Cats C/D visibility ¼ mile. Circling NA to Rwys 5 and 25.

NA

MISSED APPROACH: Climb to 2500 direct GSH VORTAC and hold.

ASOS	SOUTH BEND APP CON ★	CLNC DEL	UNICOM
121.45	132.05 257.8	125.25	123.05 (CTAF) L

ALTERNATE MISSED APCH FIX



GIPPER
115.4 GIJ
Chan 101



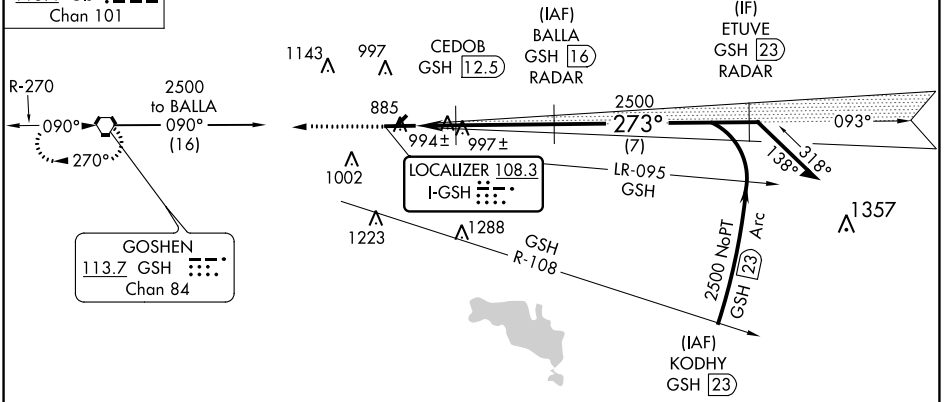



273° 5 NM from FAF

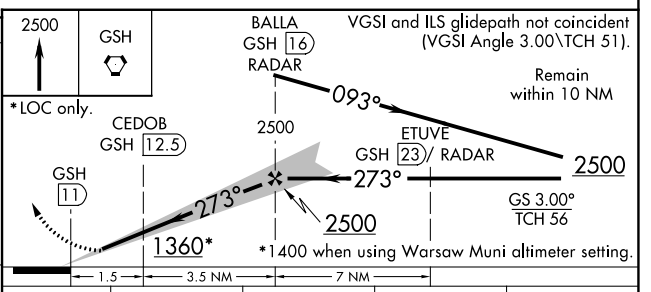

ELEV 827	TDZE 827

HIRL Rwy 9-27 L
REIL Rwys 9 and 27 L

FAF to MAP 5 NM					
Knots	60	90	120	150	180
Min:Sec	5:00	3:20	2:30	2:00	1:40

CATEGORY	A	B	C	D
S-ILS 27	1027-¾	200 (200-¾)		
S-LOC 27	1360-1	533 (600-1)	1360-1½ 533 (600-1½)	1360-1¾ 533 (600-1¾)
CIRCLING	1360-1	533 (600-1)	1360-1½ 533 (600-1½)	1380-2 553 (600-2)
CEDOB FIX MINIMUMS				
S-LOC 27	1300-1	473 (500-1)	1300-1¼ 473 (500-1¼)	1300-1½ 473 (500-1½)
CIRCLING	1300-1	473 (500-1)	1300-1½ 473 (500-1½)	1380-2 553 (600-2)

EC-2, 31 DEC 2020 to 28 JAN 2021
EC-2, 31 DEC 2020 to 28 JAN 2021