


WAAS CH 99399 W07A	APP CRS 072°	Rwy Idg TDZE 683 Apt Elev 683
--	------------------------	---

RNAV (GPS) RWY 7

EUGENE F KRANZ TOLEDO EXPRESS (TOL)

RNP APCH. <div><div>T</div>For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C or above 52°C. <div>A</div>For inop ALS, increase LPV all Cats visibility to RVR 5000. Increase LNAV/VNAV Cat E and LNAV Cat E visibility to 1⅓ SM. ASR</div>			ALSf-2 <div><div>A</div><div></div></div>	MISSED APPROACH: Climb to 3000 direct AKEPE and hold.
ATIS 118.75 290.225	TOLEDO APP CON 134.35 317.55	TOLEDO TOWER 118.1 285.4	GND CON 121.9 348.6	CLNC DEL 121.75 348.6

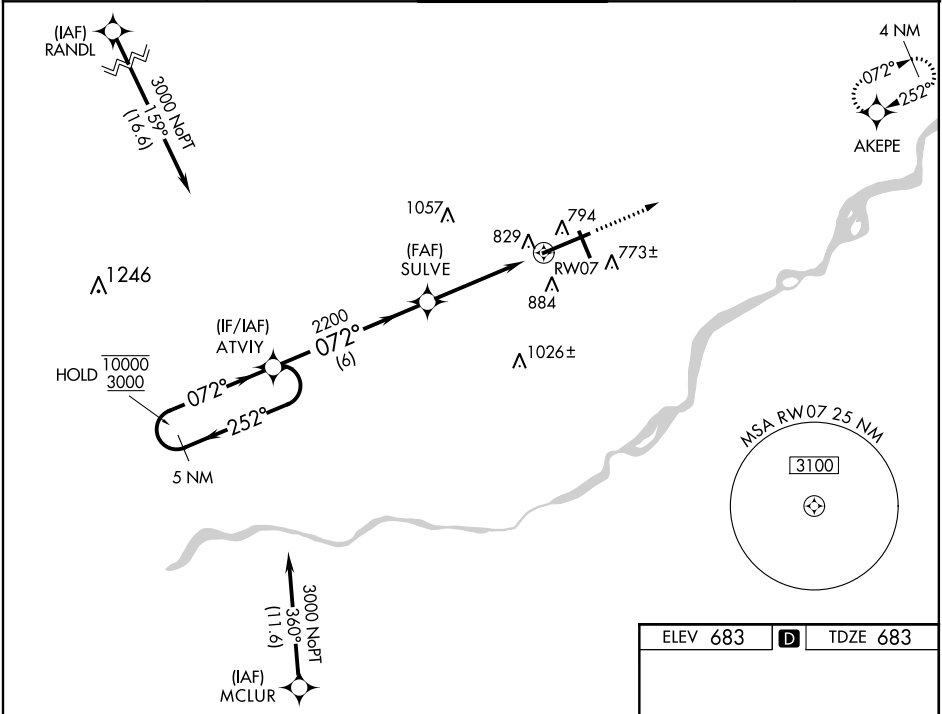

5 NM Holding Pattern		3000 ↑ AKEPE	
10000 3000 GP 3.00° TCH 55		ATVIY SULVE 2200 2200 6 NM 3.2 NM 1.3	
CATEGORY		A	
LPV DA		1018/40 335 (400-¾)	
LNAV/VNAV DA		1129/50 446 (500-1)	
LNAV MDA		1140/24 457 (500-½)	
CIRCLING		1200-1 517 (600-1)	

