


RNP APCH.		MISSED APPROACH: Climb to 2800 direct RUTEE and hold.
For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -22°C or above 54°C.		
ASOS 114.95	INDIANAPOLIS CENTER 124.45 370.9	UNICOM 123.0 (CTAF) 0*



2800 RUTEE		NODSE 2.1 NM to RW22		PROLE 2600		TWAES 4 NM Holding Pattern	
*LNAV only		*1.3 NM to RW22		*1580		GP 3.00° TCH 48	
RW22		1.3 NM		0.8 NM		3.2 NM	
CATEGORY		A		B		C	
LPV DA		1092-3/4		200 (200-3/4)			
LNAV/VNAV DA		1297-1 1/8		405 (400-1 1/8)			
LNAV MDA		1340-1 448 (500-1)		1340-1 3/8 448 (500-1 3/8)			
CIRCLING		1380-1 480 (500-1)		1420-1 520 (600-1)		1560-1 3/4 660 (700-1 3/4)	
						1620-2 1/4 720 (800-2 1/4)	

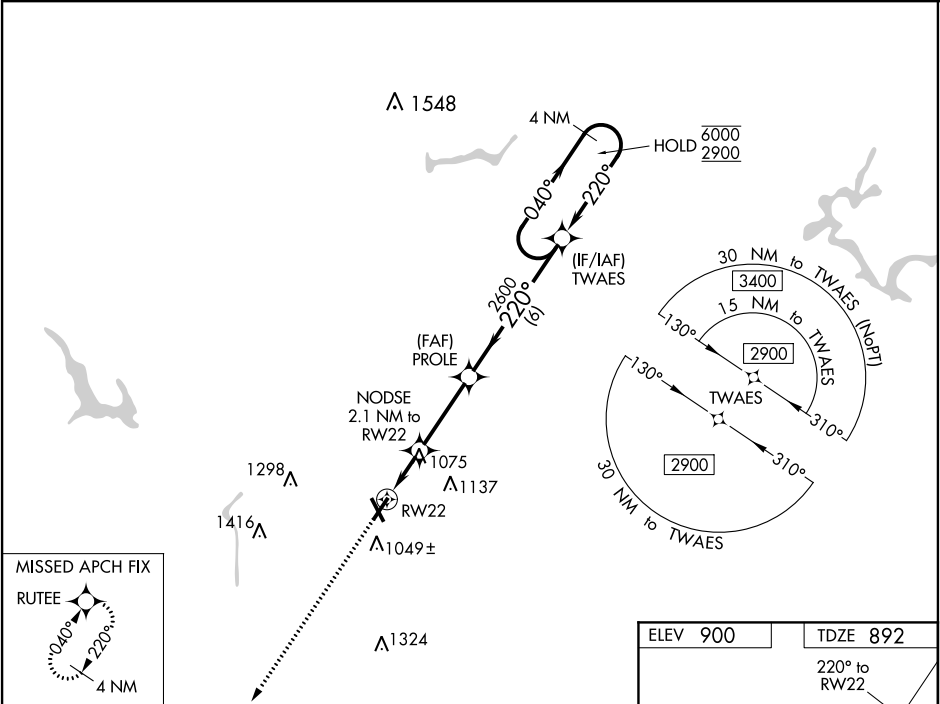