ILS or LOC RWY 24

CUYAHOGA COUNTY (CGF)

LOC/DME I-CGF	APP CRS	Rwy Idg	5000
111.1	237°	TDZE	873
Chan 48		Apt Elev	876

RNAV 1-GPS or RADAR required for procedure entry.
Aircraft not GPS equipped - RADAR required for procedure entry.

Rwy 24 helicopter visibility reduction below ¾ SM NA.
For inop ALS increase S-LOC Cats C/D to 1 SM.

MALSR

MISSED APPROACH: Climb to 1600 then climbing left turn to 3100 on CXR VOR/DME R-286 to CXR VOR/DME and hold.

AWOS-3	CLEVELAND APP CON	COUNTY TOWER★	GND CON	CLNC DEL
119.95	125.35 346.325	118.5 (CTAF) L	121.85	121.85 (when tower closed)

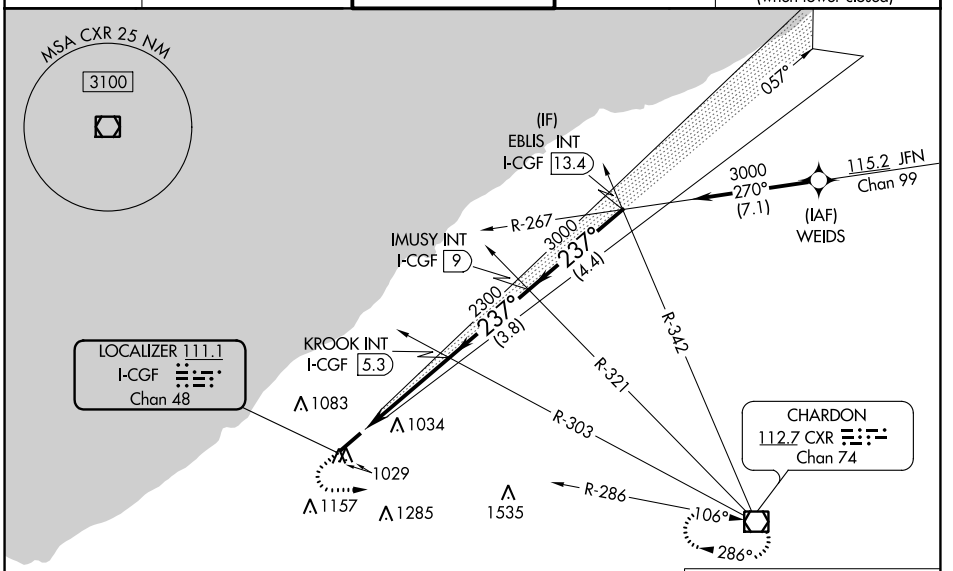

ELEV 876 D TDZE 873

2016

1640

ALTERNATE MISSED APCH FIX
112.4 BSV
Chan 71
096°
276°
R-096
R-008
WEXER
DJB 35.5
113.6 DJB
Chan 83



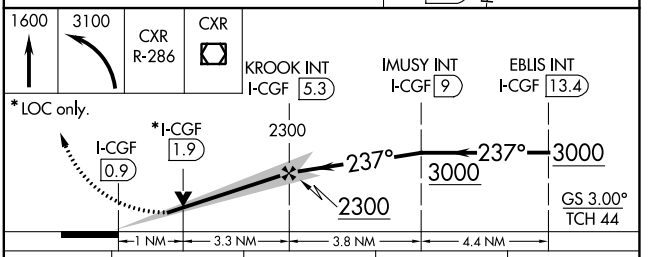

REIL Rwy 6 L
HIRL Rwy 6-24 L

FAF to MAP 4.3 NM

Knots	60	90	120	150	180
Min:Sec	4:18	2:52	2:09	1:43	1:26

CATEGORY	A	B	C	D
S-ILS 24		1073-½	200 (200-½)	
S-LOC 24	1240-½	367 (400-½)	1240-⅝	367 (400-⅝)
C CIRCLING	1400-1 524 (600-1)	1500-1 624 (700-1)	1560-2 684 (700-2)	1620-2½ 744 (800-2½)

EC-2, 31 DEC 2020 to 28 JAN 2021
EC-2, 31 DEC 2020 to 28 JAN 2021