WAAS	APP CRS	Rwy Idg	5500
CH 61300	295°	TDZE	619
W29A		Apt Elev	633

RNAV (GPS) RWY 29

BUTLER COUNTY RGNL-HOGAN FIELD (HAO)

RNP APCH.

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C or above 54°C.
For inop ALS, increase LNAV/VNAV visibility to 1⅜ SM all Cats.

MALS

MISSED APPROACH: Climb to 2700 direct MONTR and hold.

ASOS	CINCINNATI APP CON	CLNC DEL	UNICOM
121.425	121.0 254.25	126.25	123.05 (CTAF) L

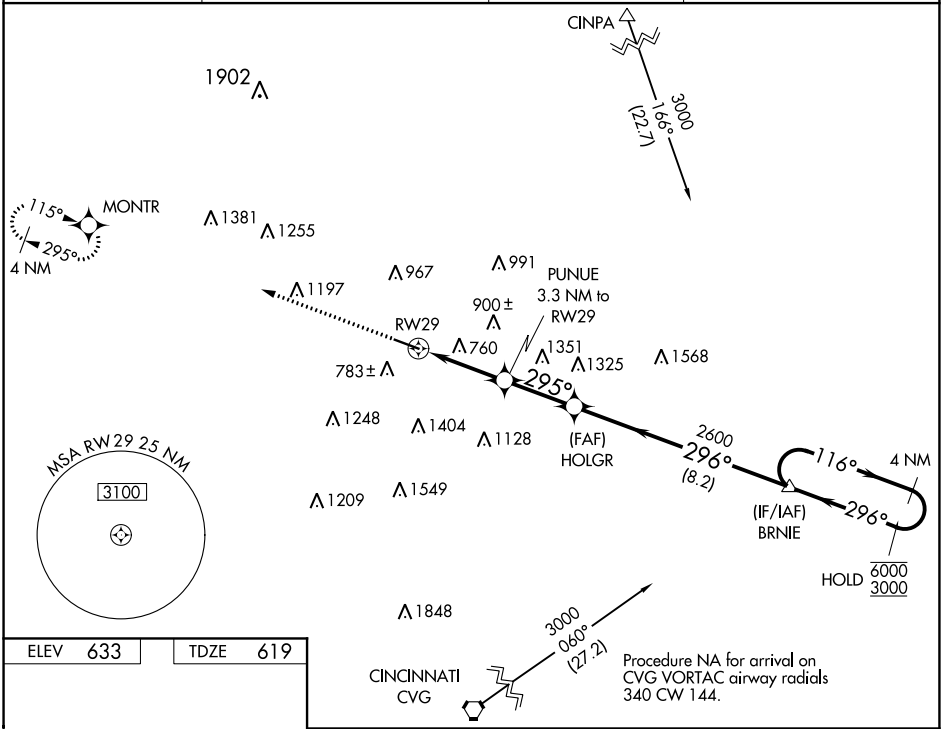

ELEV 633 TDZE 619



MIRL Rwy 11-29 L
REIL Rwys 11 and 29 L

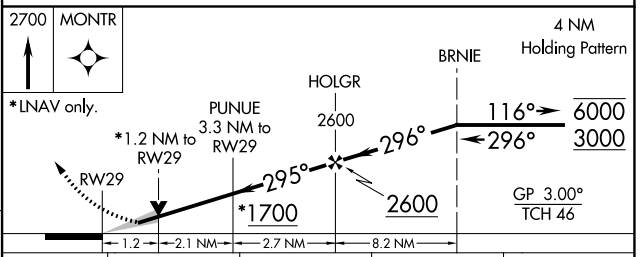

CATEGORY	A	B	C	D
LPV DA	944-¾ 325 (400-¾)			
LNAV/VNAV DA	1128-1¼ 509 (500-1¼)			
LNAV MDA	1140-¾ 521 (600-¾)		1140-1¼ 521 (600-1¼)	
C CIRCLING	1160-1 527 (600-1)	1260-1 627 (700-1)	1300-1¾ 667 (700-1¾)	1760-3 1127 (1200-3)

EC-2, 31 DEC 2020 to 28 JAN 2021
EC-2, 31 DEC 2020 to 28 JAN 2021