


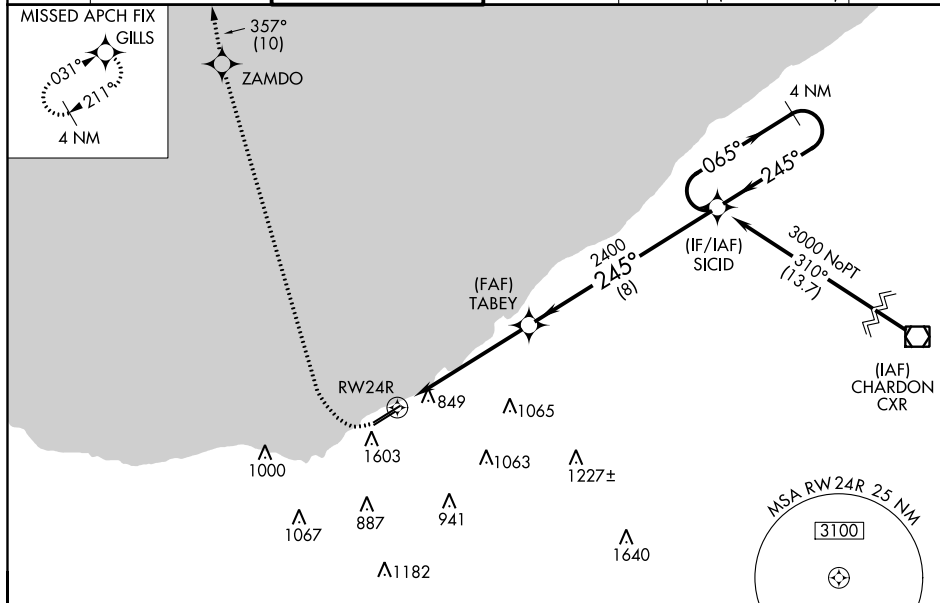



WAAS CH 77621 W24A	APP CRS 245°	Rwy Idg 6003 TDZE 583 Apt Elev 584
--	------------------------	---

RNAV (GPS) RWY 24R
BURKE LAKEFRONT (BKL)

RNP APCH.					MISSED APPROACH: Climbing right turn to 2000 direct ZAMDO then climb to 2000 on track 357° to CL and hold. Missed approach requires minimum climb of 421 feet per NM to 1900.	
<p>  For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 40°C (104°F). Circling Rwy 6R NA at night. Rwy 24R helicopter visibility reduction below ¾ SM NA. Circling NA southeast of Rwy 6R and 24L. For inop ALRS, increase LNAV Cat C and D visibility to 3 SM. </p> <p>  -23°C </p>						
ATIS 125.25	CLEVELAND APP CON 125.35 346.325	LAKEFRONT TOWER ★ 124.3 (CTAF) 0 339.8	GND CON 121.9 339.8	CLNC DEL 339.8	CLNC DEL 121.9 (when hrw closed)	UNICOM 122.95



ELEV	584	D	TDZE	583
------	-----	----------	------	-----

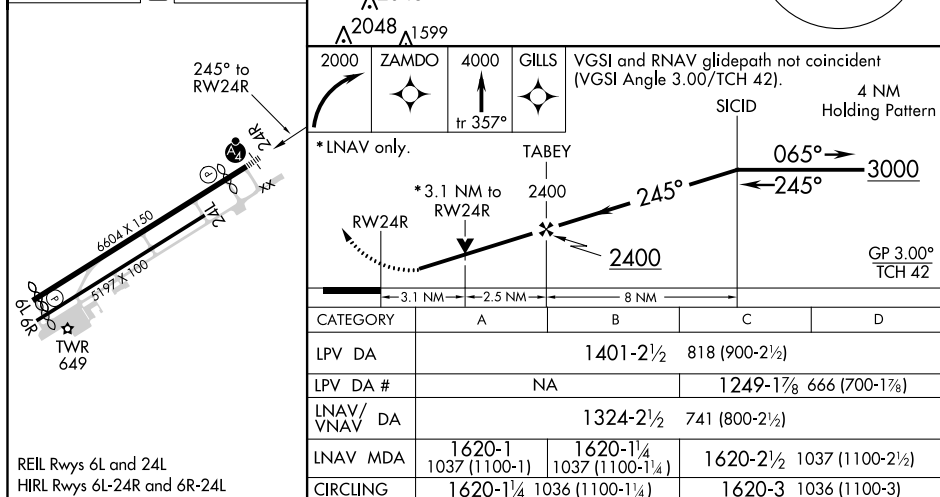

RNAV (GPS) RWY 24R