RNAV (GPS) RWY 27
HUNTINGBURG (HNB)

WAAS CH 86815 W27A	APP CRS 271°	Rwy ldg 5000 TDZE 529 Apt Elev 529

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 47°C (116°F). DME/DME RNP-0.3 NA.
VDP and Baro-VNAV NA when using Evansville altimeter setting.
When local altimeter setting not received, use Evansville altimeter setting and increase all DA 85 feet and all MDA 100 feet, increase LPV and LNAV/VNAV all Cats and LNAV Cats C and D visibility ¼ mile.

MISSED APPROACH: Climb to 2500 direct APKEW and hold.

AWOS-3PT	EVANSVILLE APP CON ★	CLNC DEL	UNICOM
118.250	124.025 290.9	118.8	122.8 (CTAF) L

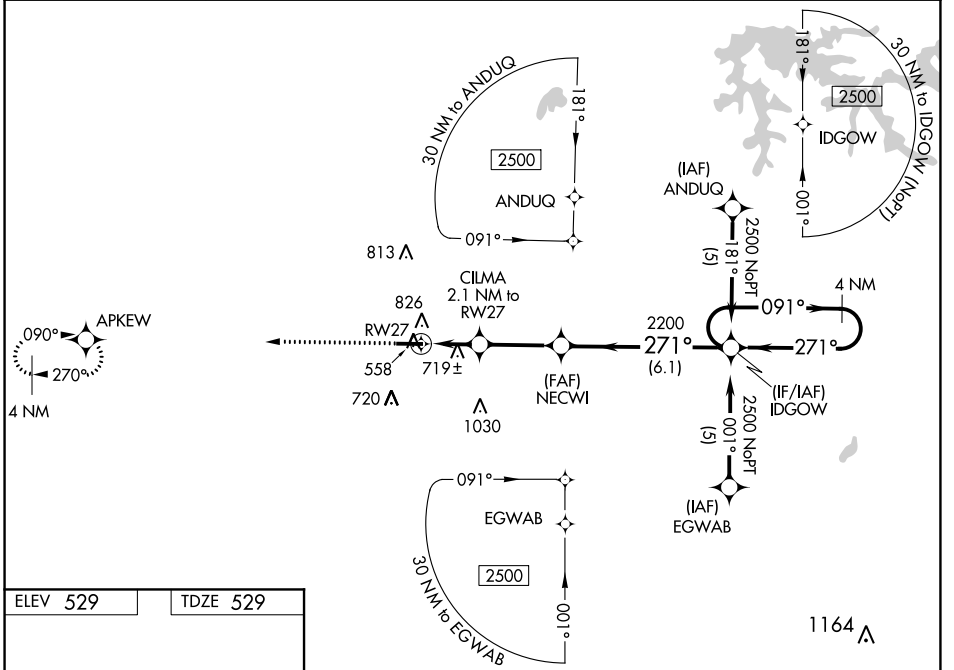

ELEV 529 TDZE 529

MIRL Rwy 9-27 L
REIL Rwys 9 and 27 L

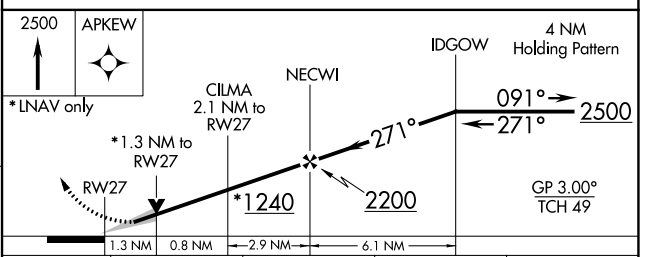

CATEGORY	A	B	C	D
LPV DA	812-1 283 (300-1)			
LNAV/VNAV DA	1038-1¾ 509 (600-1¾)			
LNAV MDA	980-1 451 (500-1)		980-1¼ 451 (500-1¼)	980-1½ 451 (500-1½)
CIRCLING	1000-1 471 (500-1)	1020-1 491 (500-1)	1020-1½ 491 (500-1½)	1080-2 551 (600-2)

EC-2, 31 DEC 2020 to 28 JAN 2021
EC-2, 31 DEC 2020 to 28 JAN 2021