# RNAV (GPS) RWY 11

FULTON COUNTY (RCR)

| APP CRS | Rwy Idg | 5001 |
|---|---|---|
| 108° | TDZE | 790 |
| | Apt Elev | 790 |

NA — DME/DME RNP-0.3 NA. Visibility reduction by helicopters NA. When local altimeter setting not received, use Goshen altimeter setting and increase all MDA 100 feet, increase LNAV Cats C and D and Circling Cat C visibility ¼ mile.

MISSED APPROACH: Climb to 3000 direct LOWTO and hold.

| AWOS-3 | SOUTH BEND APP CON ★ | UNICOM |
|---|---|---|
| 118.775 | 132.05 257.8 | 122.7 (CTAF) L |

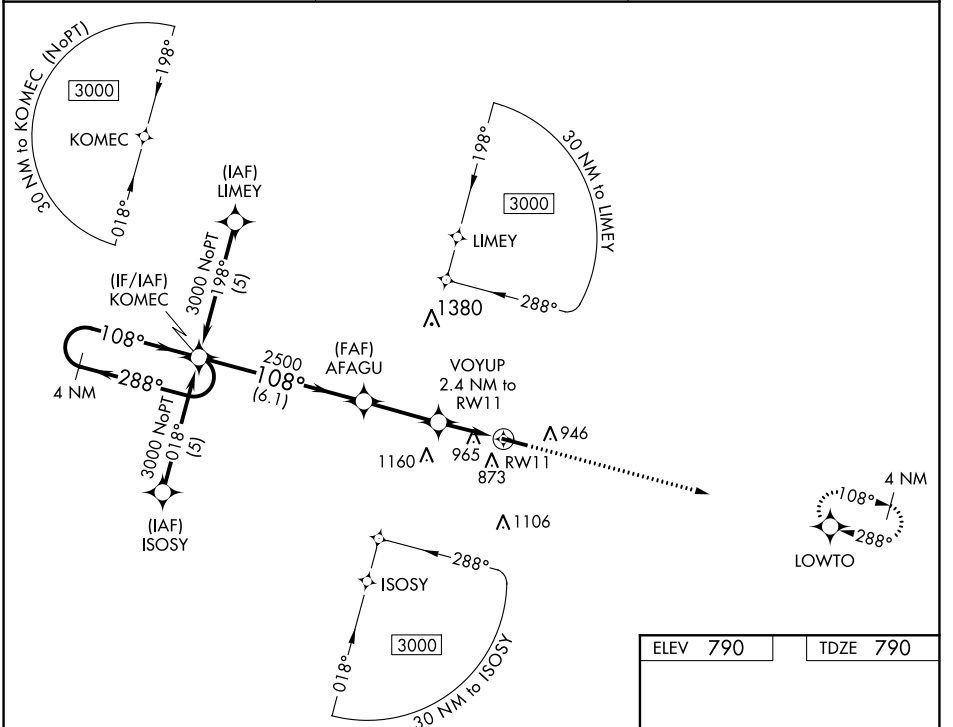


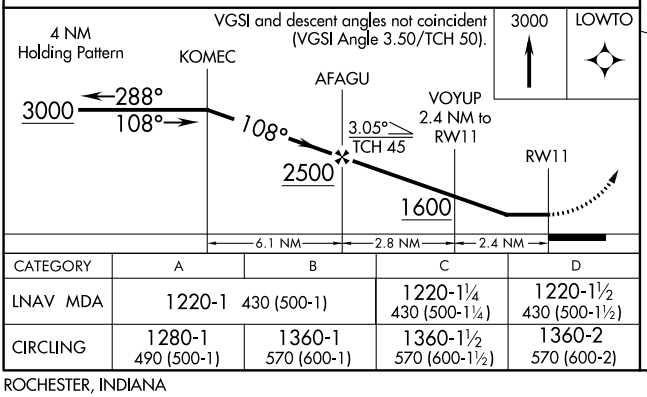


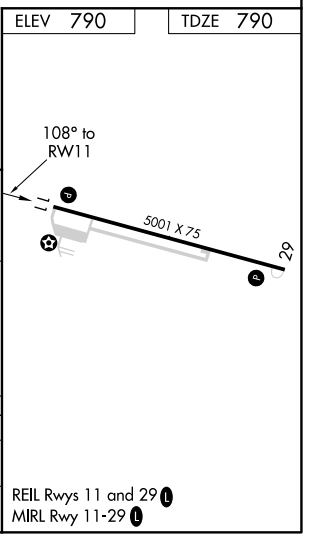


| CATEGORY | A | B | C | D |
|---|---|---|---|---|
| LNAV MDA | 1220-1 430 (500-1) | | 1220-1¼ 430 (500-1¼) | 1220-1½ 430 (500-1½) |
| CIRCLING | 1280-1 490 (500-1) | 1360-1 570 (600-1) | 1360-1½ 570 (600-1½) | 1360-2 570 (600-2) |

REIL Rwys 11 and 29 L
MIRL Rwy 11-29 L



EC-2, 31 DEC 2020 to 28 JAN 2021
EC-2, 31 DEC 2020 to 28 JAN 2021