

WAAS CH 82739 W04A	APP CRS 047°	Rwy Idg TDZE 797 Apt Elev 800	5505 797 800
--	------------------------	---	---

RNAV (GPS) RWY 4

CRAWFORDSVILLE RGNL (CFJ)

RNP APCH.



▼

▲

Baro-VNAV NA when using Greencastle altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. When local altimeter setting not received, use Greencastle altimeter setting: increase LPV DA to 1128 feet and all visibilities ¼ SM, LNAV/VNAV DA to 1118 feet and all visibilities ¼ SM; increase all MDA 60 feet and Circling Cats C and D visibilities ¼ SM. Rwy 4 helicopter visibility reduction below ¾ SM NA.

MISSED APPROACH:
Climb to 2700 direct CONUM and hold.

AWOS-3PT 125.65	INDIANAPOLIS APP CON 119.05 317.8	UNICOM 122.8 (CTAF) 0
---------------------------	---	---------------------------------

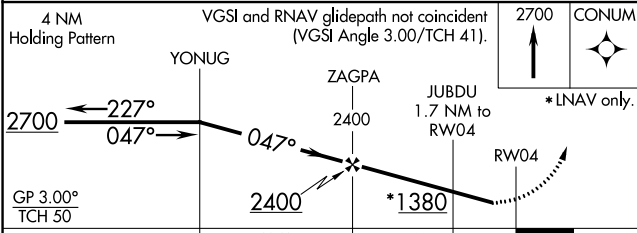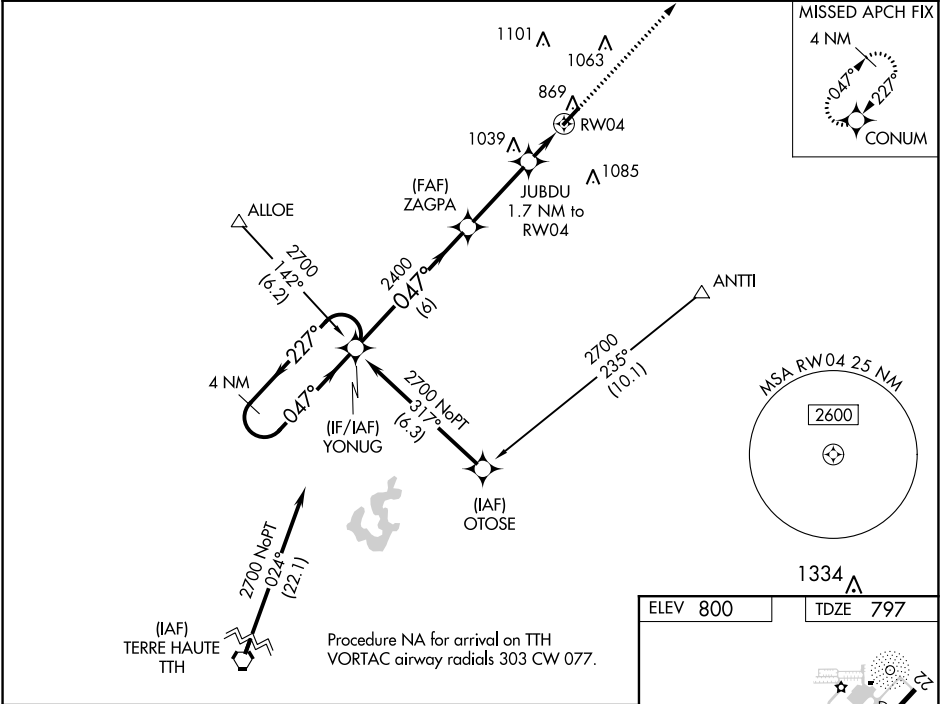

CATEGORY	A	B	C	D
LPV DA		1076-7⁄8	279 (300-¾)	
LNAV/VNAV DA		1066-7⁄8	269 (300-¾)	
LNAV MDA	1240-1	443 (500-1)	1240-1¾	443 (500-1¾)
CIRCLING	1240-1 440 (500-1)	1260-1 460 (500-1)	1440-1¾ 640 (700-1¾)	1520-2¼ 720 (800-2¼)

