WAAS	APP CRS		
CH **69329**	**227°**	Rwy Idg	**5405**
W23A		TDZE	**716**
		Apt Elev	**725**

RNAV (GPS) RWY 23

ROSS COUNTY (RZT)

RNP APCH.

T A For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (3°F) or above 39°C (103°F). When local altimeter setting not received, use Rickenbacker Intl altimeter setting and increase all DA/MDA 60 feet, increase LPV all Cats, LNAV/VNAV all Cats and LNAV Cat C and D and Circling Cat C visibility ¼ mile. Baro-VNAV and VDP NA when using Rickenbacker Intl altimeter setting. Rwy 23 helicopter visibility reduction below ¾ SM NA.

MISSED APPROACH: Climb to 1500 then climbing right turn to 3000 direct JONEX and hold.

AWOS-3	COLUMBUS APP CON	UNICOM	
119.225	**134.0 279.6**	**122.8** (CTAF)	**123.0** L

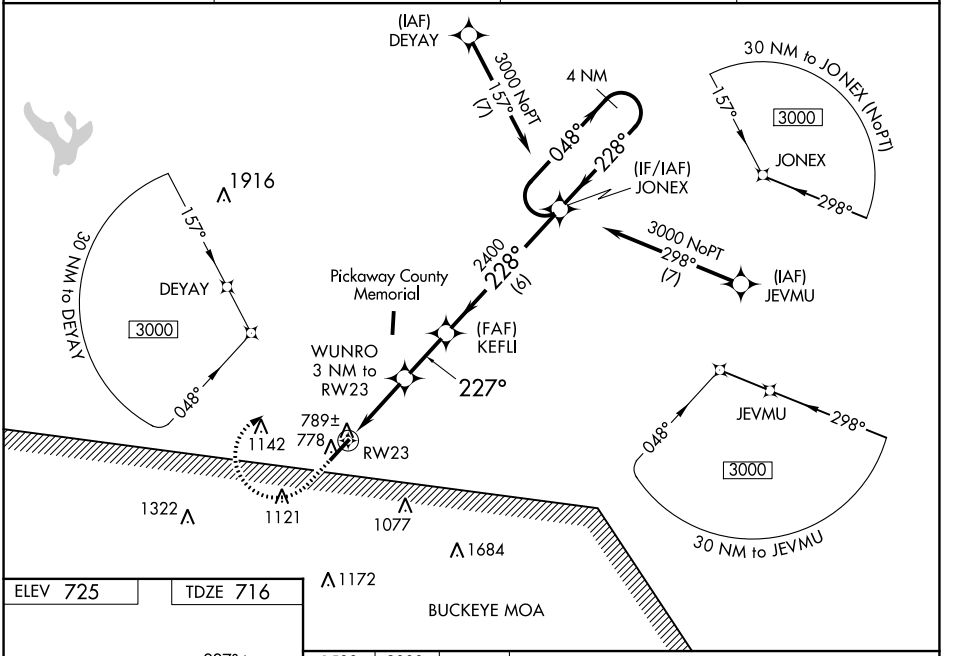

EC-2, 31 DEC 2020 to 28 JAN 2021

EC-2, 31 DEC 2020 to 28 JAN 2021

ELEV 725 TDZE 716



REIL Rwys 5 and 23 L
MIRL Rwy 5-23 L

1500	3000	JONEX

VGSI and RNAV glidepath not coincident.

4 NM Holding Pattern

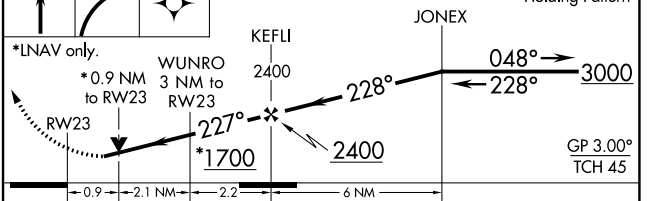

CATEGORY	A	B	C	D
LPV DA	966-¾	250 (300-¾)		
LNAV/VNAV DA	1088-1¼	372 (400-1¼)		
LNAV MDA	1040-1	324 (400-1)		
CIRCLING	1320-1 595 (600-1)	1380-1 655 (700-1)	1380-1¾ 655 (700-1¾)	1400-2¼ 675 (700-2¼)