


ILS or LOC RWY 32R  
UNIVERSITY OF ILLINOIS-WILLARD (CMI)


MALSR

**MISSED APPROACH:** Climb to 1200 then climbing left turn to 2800 on CMI VORTAC R-297 to LODGE INT/CMI VORTAC 13.2 DME and hold.

|                       |  |  |                         |                           |                         |
|-----------------------|--|--|-------------------------|---------------------------|-------------------------|
| ATIS<br><b>124.85</b> | CHAMPAIGN APP CON ★<br><b>121.35 285.65</b> (319°-138°)<br><b>132.85 290.225</b> (139°-318°) | CHAMPAIGN TOWER ★<br><b>120.4 (CTAF) 0 229.4</b> | GND CON<br><b>121.8</b> | CLNC DEL<br><b>128.75</b> | UNICOM<br><b>122.95</b> |
|-----------------------|--|--|-------------------------|---------------------------|-------------------------|

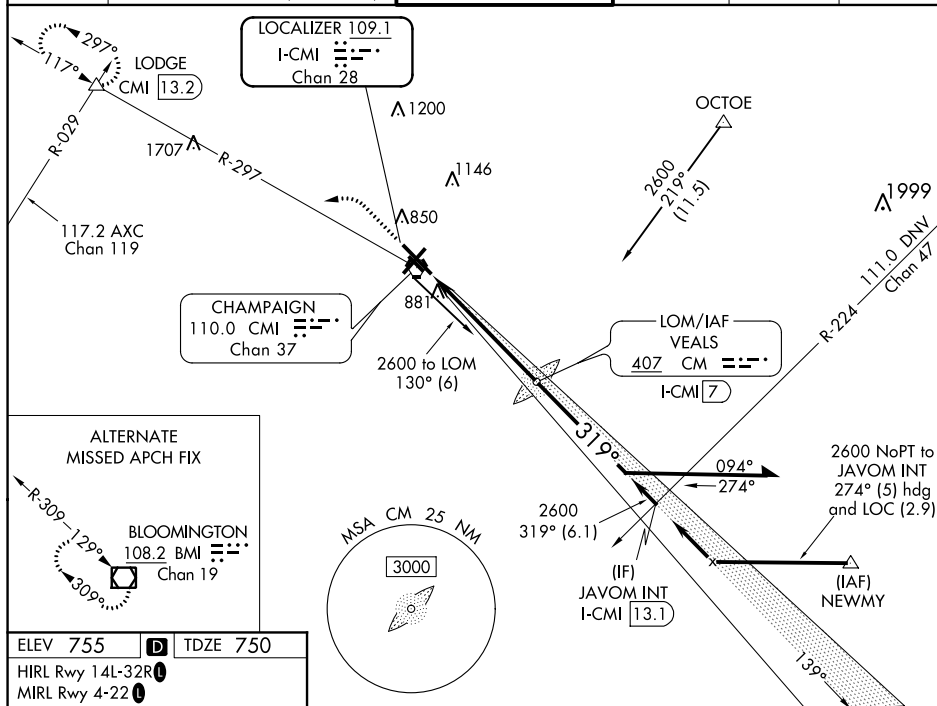

|                           |          |          |
|---------------------------|----------|----------|
| ELEV 755                  | <b>D</b> | TDZE 750 |
| HIRL Rwy 14L-32R <b>L</b> |          |          |
| MIRL Rwy 4-22 <b>L</b>    |          |          |
| MIRL Rwy 14R-32L          |          |          |

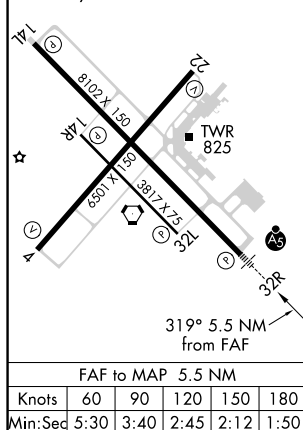

|  |                      |             |                         |                         |
|--|----------------------|-------------|-------------------------|-------------------------|
| 1200<br>↑  | 2800<br>CMI<br>R-297 | LODGE<br>△  |                         |                         |
| <p>*LOC only.</p> <p>CM LOM<br/>I-CMI 7</p> <p>2572</p> <p>139°</p> <p>319°</p> <p>2600</p> <p>GS 3.00°<br/>TCH 52</p> <p>Remain within 10 NM</p> <p>I-CMI 1.5</p> <p>1.1 NM</p> <p>4.4 NM</p> |                      |             |                         |                         |
| CATEGORY   | A                    | B           | C                       | D                       |
| S-ILS 32R **   | 950/24 200 (200-½)   |             |                         |                         |
| S-LOC 32R  | 1160/24              | 410 (500-½) | 1160/40                 | 410 (500-¾)             |
| <b>C</b> CIRCLING  | 1240-1               | 485 (500-1) | 1500-2¼<br>745 (800-2¼) | 1500-2½<br>745 (800-2½) |