

LOC I-SGZ
109.9

APP CRS
002°

Rwy Idg
8201

TDZE
684

Apt Elev
695

ILS or LOC RWY 36
GREEN BAY-AUSTIN STRAUBEL INTL (GRB)

NA

For inoperative MALS, increase S-LOC 36 MAZTT fix minimums Cat D visibility to RVR 5000.


ASR

** RVR 1800 authorized with the use of FD or AP or HUD to DA.

MALS

MISSED APPROACH: Climb to 1400 then climbing left turn to 2500 direct GRB VORTAC and hold.

ATIS 124.1	GREEN BAY APP CON * 119.4 338.2	GREEN BAY TOWER * 118.7 (CTAF) 257.8	GND CON 121.9	CLNC DEL 121.75
----------------------	---	--	-------------------------	---------------------------

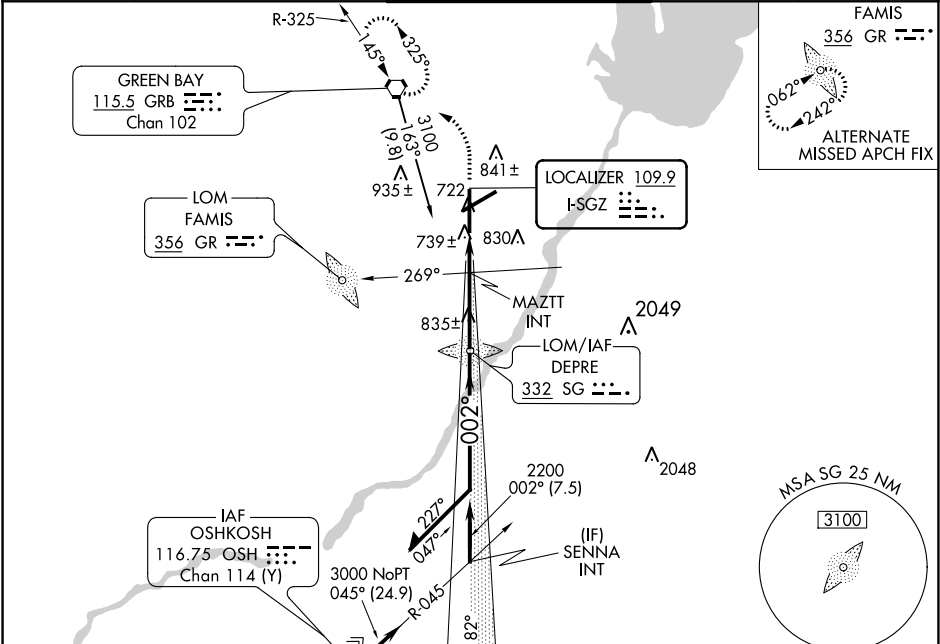

ELEV 695 TDZE 684

REIL Rwy 18
HIRL Rwy 6-24 and 18-36

81 TWR 796
8700 X 150
36 002° 4.3 NM from FAF

FAF to MAP 4.3 NM

Knots	60	90	120	150	180
Min:Sec	4:18	2:52	2:09	1:43	1:26

1400 2500 GRB

SG LOM 3100

Remain within 10 NM

*LOC only

MAZTT INT

2116

182°

002°

2700

GS 3.00° TCH 50

1200

2200

1.5 NM 2.8 NM

CATEGORY	A	B	C	D
S-ILS 36	**884/24 200 (200-½)			
S-LOC 36	1200/24	516 (600-½)	1200/50 516 (600-1)	1200/60 516 (600-1½)
CIRCLING	1200-1	505 (600-1)	1200-1½ 505 (600-1½)	1260-2 565 (600-2)
MAZTT FIX MINIMUMS				
S-LOC 36	980/24 296 (300-½)			980/40 296 (300-¾)
CIRCLING	1200-1	505 (600-1)	1200-1½ 505 (600-1½)	1260-2 565 (600-2)