# RNAV (GPS) RWY 4

## SOUTHERN WISCONSIN RGNL (JVL)

| WAAS | APP CRS | Rwy Idg | 6701 |
|---|---|---|---|
| CH 82617 | 043° | TDZE | 806 |
| W04A | | Apt Elev | 808 |

T A Circling to Rwy 18 NA at night. Baro-VNAV NA when using Rockford altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 47°C (116°F). DME/DME RNP-0.3 NA. VDP NA with Rockford altimeter setting. When local altimeter setting not received, use Rockford altimeter setting and increase all DA 69 feet and all MDA 80 feet; increase LNAV/VNAV all Cats visibility ¼ mile and Circling Cat D visibility ¼ mile. For inoperative MALSR, when using Rockford altimeter setting increase LPV all Cats visibility to 1 mile.

MALSR (A5)

MISSED APPROACH: Climb to 3100 direct OTLEE and hold.

| ATIS | ROCKFORD APP CON | JANESVILLE TOWER ★ | GND CON | CLNC DEL | UNICOM |
|---|---|---|---|---|---|
| 128.25 | 121.0 327.0 | 118.8 (CTAF) L 225.4 | 121.65 | 121.65 | 122.95 |

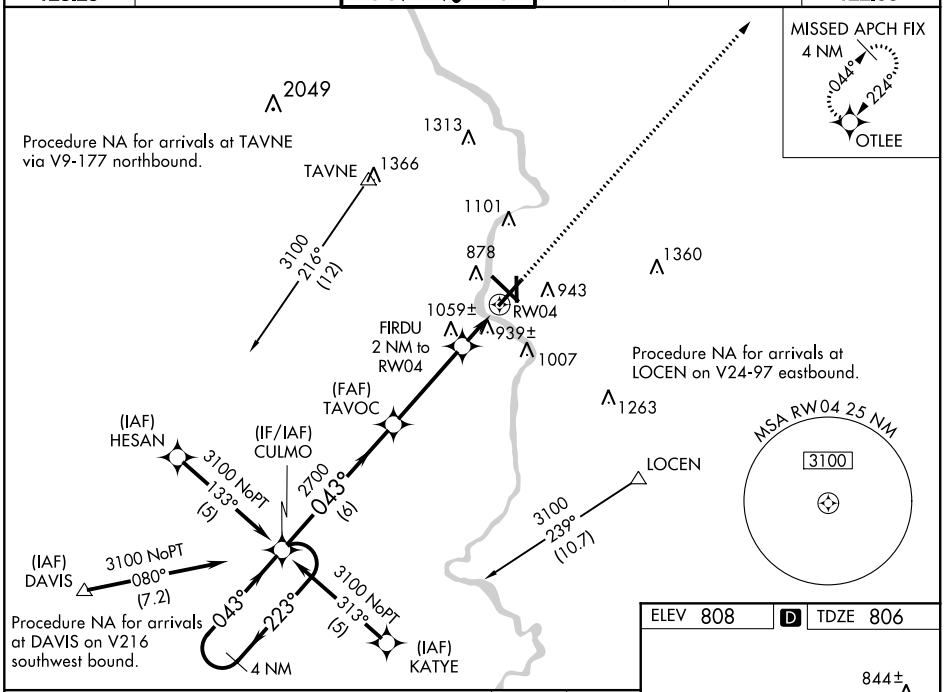


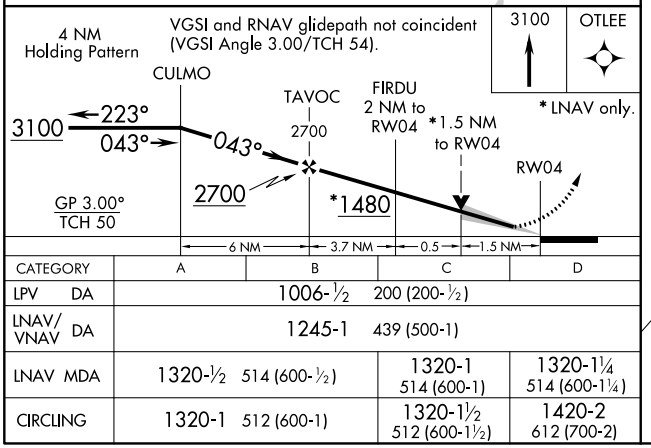


| CATEGORY | A | B | C | D |
|---|---|---|---|---|
| LPV DA | 1006-½ 200 (200-½) | | | |
| LNAV/VNAV DA | 1245-1 439 (500-1) | | | |
| LNAV MDA | 1320-½ 514 (600-½) | | 1320-1 514 (600-1) | 1320-1¼ 514 (600-1¼) |
| CIRCLING | 1320-1 512 (600-1) | | 1320-1½ 512 (600-1½) | 1420-2 612 (700-2) |

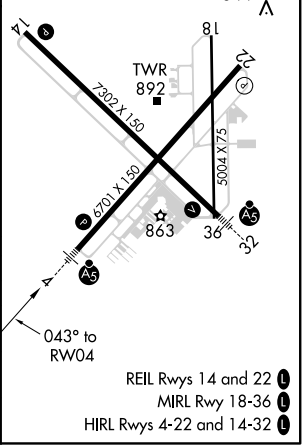




EC-3, 31 DEC 2020 to 28 JAN 2021
EC-3, 31 DEC 2020 to 28 JAN 2021