

APP CRS
354°

Rwy Idg
TDZE
544

Apt Elev
545

RNAV (GPS) RWY 35



ST LOUIS RGNL (ALN)

RNP APCH

▼ Visibility reduction by helicopters NA. When local altimeter setting not received, use St Louis Lambert Intl altimeter setting and increase all MDA 60 feet and increase LNAV Cat C and D visibility ½ mile. When VGSI inop, Straight-in/Circling Rwy 35 procedure and Circling Rwy 17 NA at night.

▲ MISSED APPROACH: Climb to 2200 direct JETIK and hold.

ATIS 128.0	ST LOUIS APP CON 124.2 353.9	REGIONAL TOWER ★ 126.0 (CTAF) 0 239.0	GND CON 120.2	CLNC DEL 120.2 (when tower closed)	UNICOM 122.95
----------------------	--	---	-------------------------	---	-------------------------

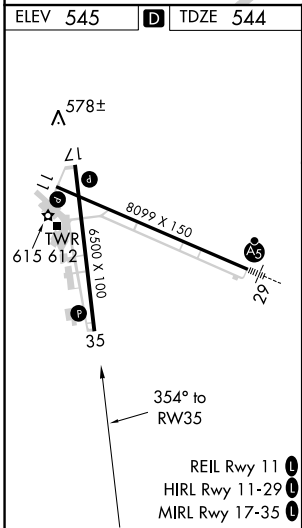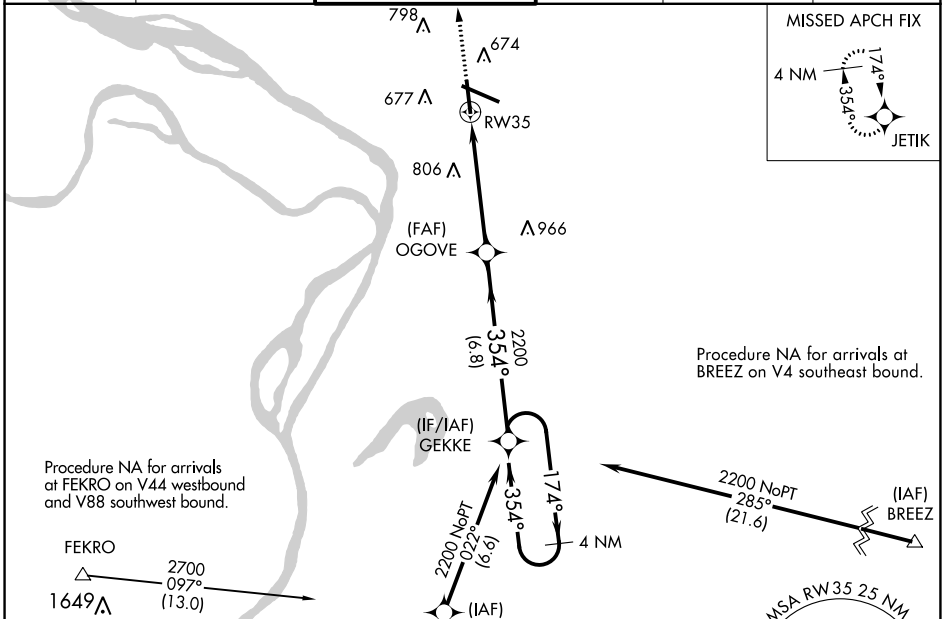

2200	JETIK	Visual Segment - Obstacles.	4 NM	Holding Pattern
OGOVE	GEKKE	354°	174°	2200
5.1 NM	6.8 NM			
CATEGORY	A	B	C	D
LNAV MDA	1020-1	476 (500-1)	1020-1 3/8	476 (500-1 3/8)
CIRCLING	1020-1	475 (500-1)	1020-1 1/2	1100-2
			475 (500-1 1/2)	555 (600-2)