

WAAS CH 93629 W03A	APP CRS 025°	Rwy Idg TDZE 764 Apt Elev 764	5792 764 764
--	------------------------	---	---

RNAV (GPS) RWY 3


GALESBURG MUNI (GBG)

⚠ DME/DME RNP-0.3 NA. VDP and Baro-VNAV NA when using Macomb altimeter setting. When local altimeter setting not received, use Macomb altimeter setting and increase all DA 71 feet and all MDA 80 feet, increase LNAV/VNAV visibility to ¾ all Cats, increase LNAV Cat C/D visibility to 1. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 39°C (102°F). Circling to Rwy 10 NA at night. For inoperative MALSR, increase LNAV/VNAV visibility to ¾ all Cats. For inoperative MALSR when using Macomb altimeter setting, increase LPV visibility to ¾ all Cats, increase LNAV Cats C/D visibility to 1¾.

MALSR
AS

MISSED APPROACH:
Climb to 3000 direct EJIYU and hold.

AWOS-3 118.975	QUAD CITY APP CON ★ 133.275 257.8	CLNC DEL 120.7	UNICOM 123.0 (CTAF) 0
--------------------------	---	--------------------------	---------------------------------

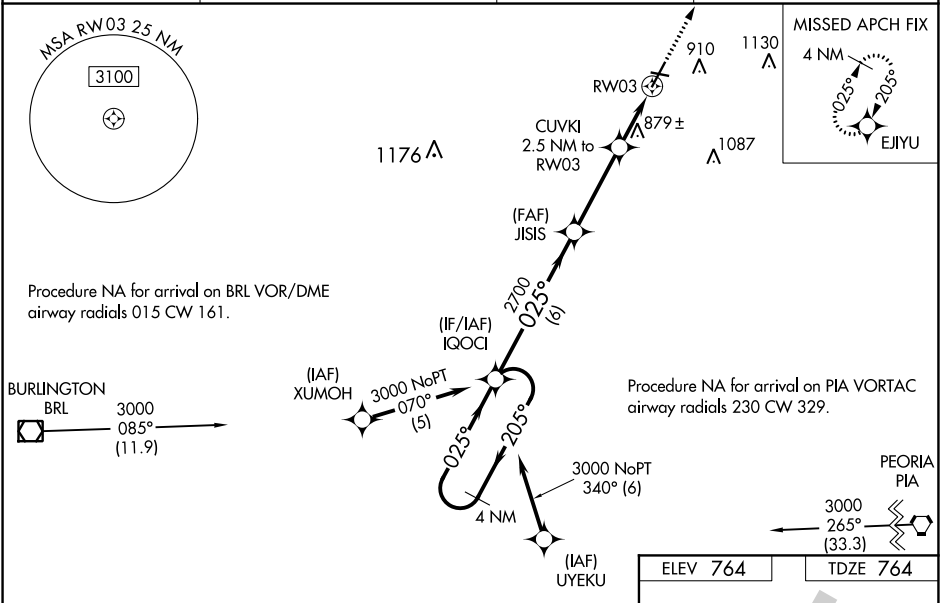

4 NM Holding Pattern IQOCI

3000 ← 205° → 025° →

GP 3.00° TCH 55

2700

025°

JISIS 2700

CUVKI 2.5 NM to RW03

*1 NM to RW03

RW03

*1600

6 NM 3.4 NM 1.5 NM 1 NM

3000 EJIYU

*LNAV only

CATEGORY	A	B	C	D
LPV DA		964-½	200 (200-½)	
LNAV/VNAV DA		1060-½	296 (300-½)	
LNAV MDA	1140-½ 376 (400-½)		1140-⅝ 376 (400-⅝)	
CIRCLING	1220-1 456 (500-1)		1220-1½ 456 (500-1½)	1340-2 576 (600-2)

ELEV 764 TDZE 764

843 21

Λ 825

Λ 776±

3600 X 100

572 X 150

AS

025° to RW03

REIL Rwy 21 0

HIRL Rwy 3-21 0

MIRL Rwy 10-28 0