WAAS CH 73029 W34A	APP CRS 336°	Rwy ldg 4435 TDZE 1459 Apt Elev 1478

RNAV (GPS) RWY 34
TAYLOR COUNTY (MDZ)

RNP APCH.

When local altimeter setting not received, use Merrill altimeter setting and increase all MDA 100 feet. Increase LP Cat C/D visibility ¼ mile, LNAV Cat C/D visibility ¼ mile, and Circling Cat D visibility ⅜ mile. VDP NA when using Merrill altimeter setting.

MISSED APPROACH: Climb to 4000 direct HORMA and hold.

AWOS-3	MINNEAPOLIS CENTER	UNICOM
119.025	124.4 317.7	122.8 (CTAF) L

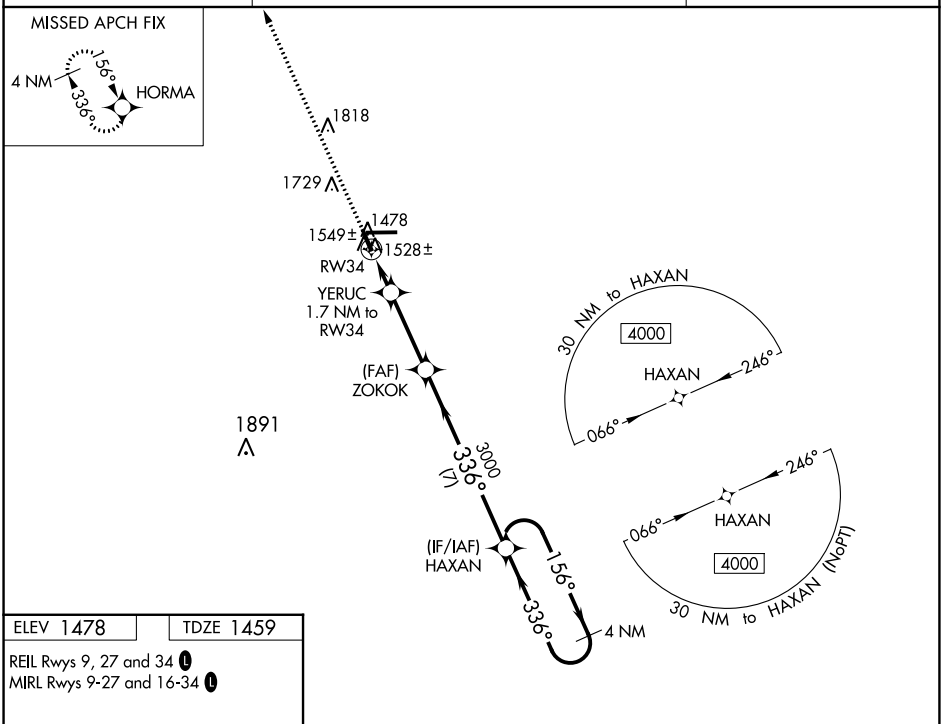

ELEV 1478 TDZE 1459

REIL Rwys 9, 27 and 34 L
MIRL Rwys 9-27 and 16-34 L

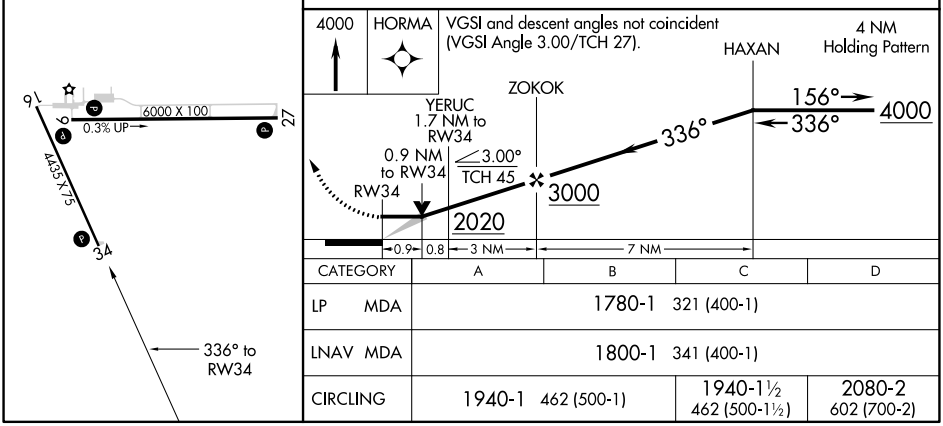

CATEGORY	A	B	C	D
LP MDA	1780-1 321 (400-1)			
LNAV MDA	1800-1 341 (400-1)			
CIRCLING	1940-1 462 (500-1)		1940-1½ 462 (500-1½)	2080-2 602 (700-2)

EC-3, 31 DEC 2020 to 28 JAN 2021
EC-3, 31 DEC 2020 to 28 JAN 2021