RNAV (GPS) RWY 17

LANGLADE COUNTY (AIG)

WAAS	APP CRS	Rwy Idg	4010
CH 49131	166°	TDZE	1522
W17A		Apt Elev	1523

Baro-VNAV NA when using Wausau Downtown altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -18°C (0°F) or above 54°C (130°F). Procedure NA at night. DME/DME RNP-0.3 NA. Helicopter visibility reduction below 1 SM NA. When local altimeter setting not received, use Wausau Downtown altimeter setting; increase all DA 105 feet all LPV visibilities ¼ mile, and all LNAV/VNAV visibilities ⅜ mile; increase all MDA 120 feet, LNAV Cat C and D visibilities ¼ mile, Circling Cat C visibility ½ mile, and Cat D visibility ¼ mile.

MISSED APPROACH: Climb to 3300 direct ZABVI and hold.

AWOS-3	MINNEAPOLIS CENTER	UNICOM
119.075	124.4 317.7	122.8 (CTAF) L

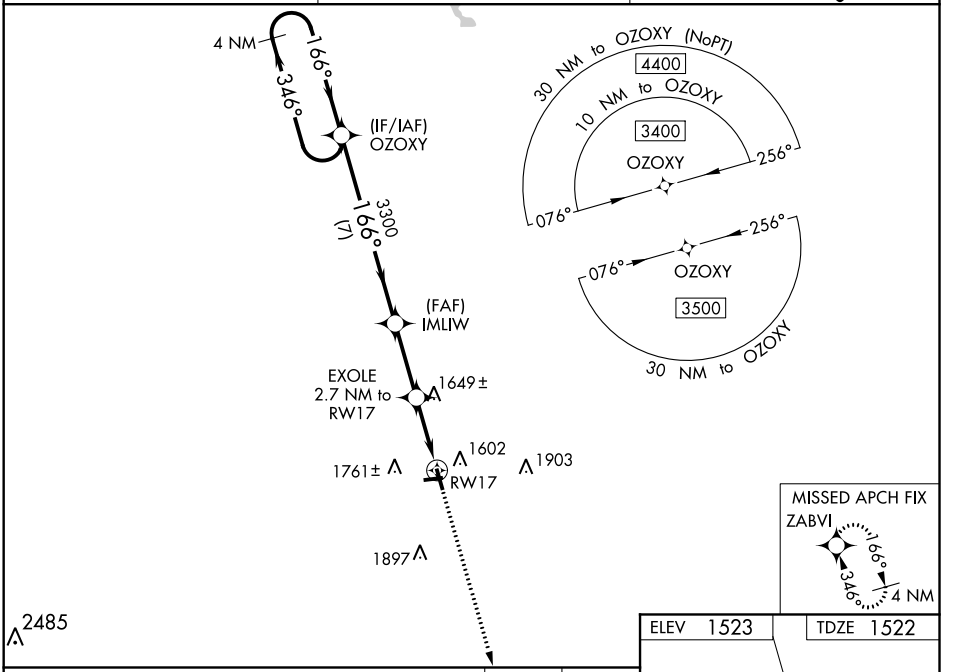

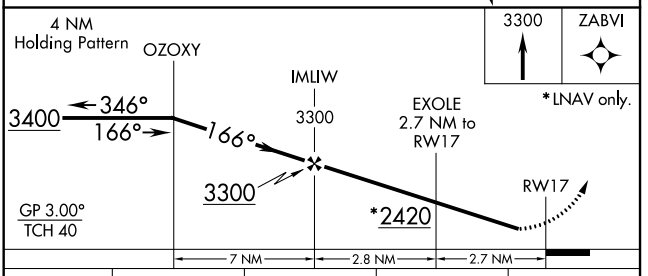

CATEGORY	A	B	C	D
LPV DA	1772-1 250 (300-1)			
LNAV/VNAV DA	1924-1⅜ 402 (400-1⅜)			
LNAV MDA	1920-1 398 (400-1)		1920-1⅛ 398 (400-1⅛)	
CIRCLING	2120-1 597 (600-1)		2120-1½ 597 (600-1½)	2120-2 597 (600-2)

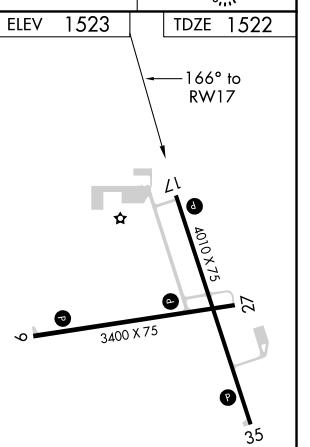

REIL Rwys 17 and 35 L
MIRL Rwys 17-35 and 9-27 L

EC-3, 31 DEC 2020 to 28 JAN 2021
EC-3, 31 DEC 2020 to 28 JAN 2021