RNAV (GPS) RWY 3

FLORA MUNI (FOA)

WAAS	APP CRS	Rwy Idg	5003
CH 82428	031°	TDZE	473
W03A		Apt Elev	473

RNP APCH.

Baro-VNAV NA when using Olney-Noble altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C or above 54°C. When local altimeter setting not received, use Olney-Noble altimeter setting and increase all DA 33 feet and all MDA 40 feet; increase LPV visibility all Cats, and LNAV Cat C visibility ⅛ mile, Circling Cat C visibility ¼ mile.
Rwy 3 helicopter visibility reduction below ¾ SM NA. Circling NA to Rwys 15 and 33.

MISSED APPROACH: Climb to 2200 direct FIPEN and hold.

AWOS-3	KANSAS CITY CENTER	UNICOM
120.175	127.7 351.825	122.7 (CTAF) L

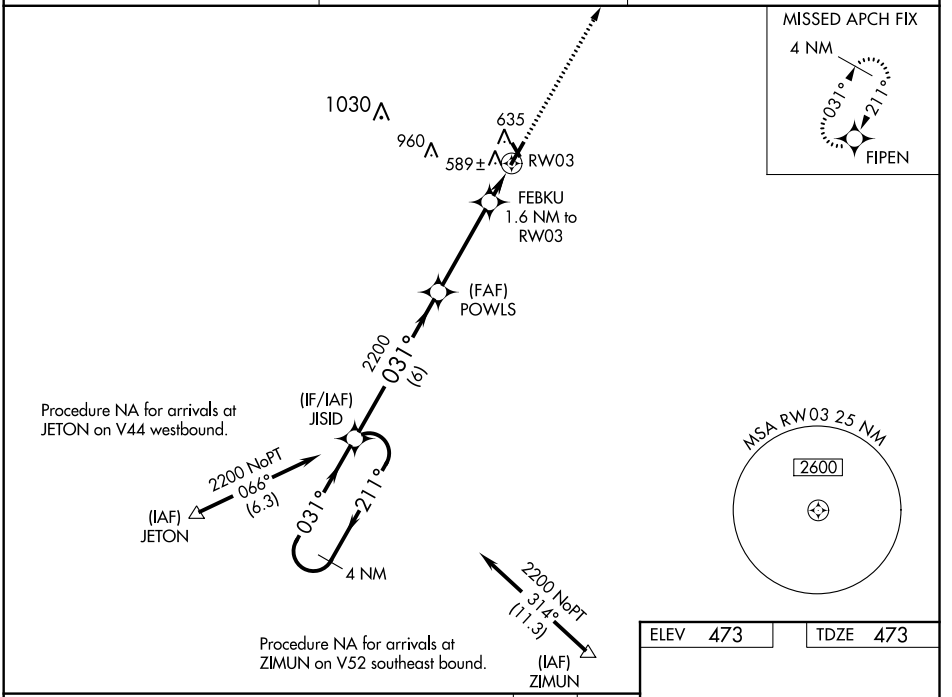

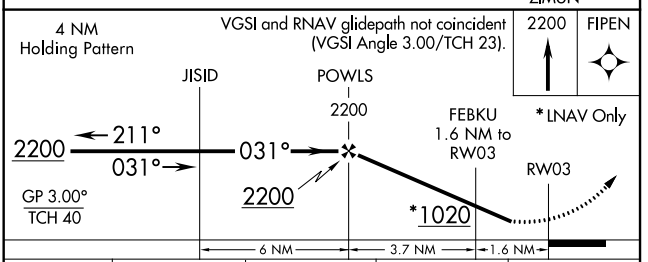

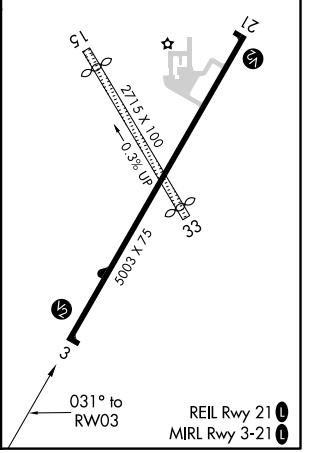

CATEGORY	A	B	C	D
LPV DA	783-1	310 (400-1)		NA
LNAV/VNAV DA	859-1⅜	386 (400-1⅜)		NA
LNAV MDA	860-1	387 (400-1)	860-1⅛ 387 (400-1⅛)	NA
CIRCLING	940-1	467 (500-1)	1120-1¾ 647 (700-1¾)	NA

EC-3, 31 DEC 2020 to 28 JAN 2021
EC-3, 31 DEC 2020 to 28 JAN 2021