

WAAS CH 50308 W24A	APP CRS 241°	Rwy Idg TDZE 666 Apt Elev 666
--	------------------------	---


RNAV (GPS) RWY 24

PONTIAC MUNI (PNT)

DME/DME RNP-0.3 NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 54°C (130°F). When local altimeter setting not received, use Bloomington/Normal altimeter setting and increase all DA 98 feet and all MDA 100 feet, and increase LPV all Cats, LNAV/VNAV all Cats, LNAV and Circling Cat C visibility ¼ mile. Baro-VNAV and VDP NA when using Bloomington/Normal altimeter setting.

MISSED APPROACH:
Climb to 3000 direct
BUCLA and hold.

AWOS-3 119.675	CHICAGO CENTER 123.75 259.1	UNICOM 123.075 (CTAF) 0
--------------------------	---------------------------------------	-----------------------------------

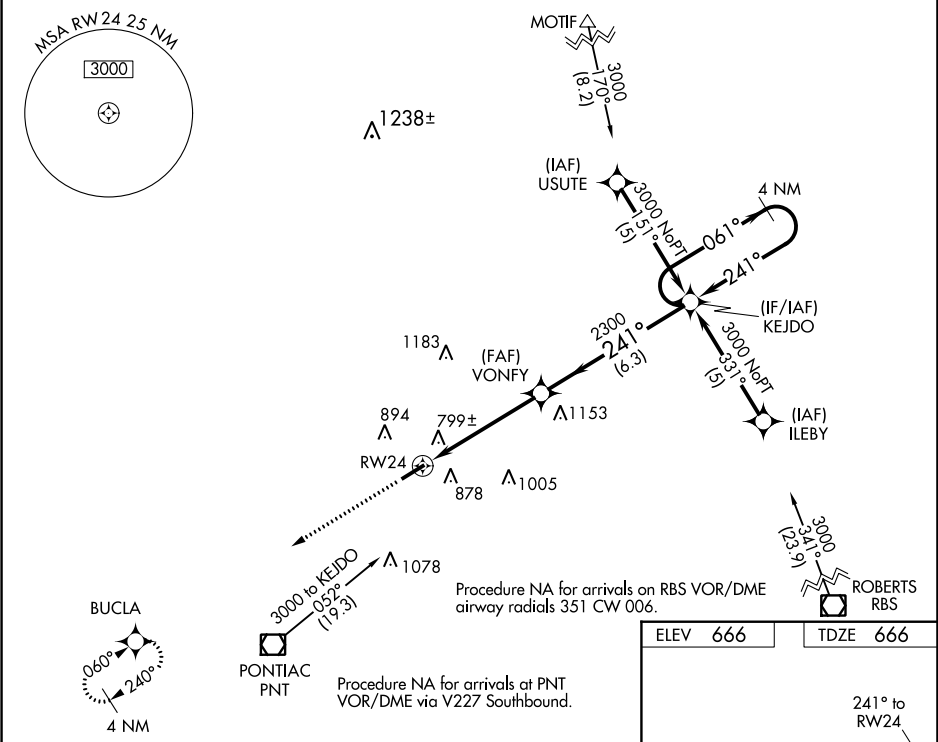

3000	BUCLA	KEJDO	4 NM	Holding Pattern
*LNAV only.	*1.6 NM to RW24	VONFY	241°	061°
RW24	2300	3000	GP 3.00°	TCH 35
1.6 NM	3.3 NM	6.3 NM		
CATEGORY	A	B	C	D
LPV DA	916-1	250 (300-1)		NA
LNAV/VNAV DA	1139-1¾	473 (500-1¾)		NA
LNAV MDA	1220-1	554 (600-1)	1220-1½ 554 (600-1½)	NA
CIRCLING	1220-1	554 (600-1)	1220-1½ 554 (600-1½)	NA

