RNAV (GPS) RWY 18

HECTOR INTL (FAR)

WAAS	APP CRS	Rwy Idg	9001
CH 40006	176°	TDZE	900
W18A		Apt Elev	901

RNP APCH.

For inoperative MALSR, increase LPV Cat E visibility to RVR 4000 and LNAV/VNAV Cat E and LNAV Cat D and E to RVR 6000. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 47°C (116°F).
#RVR 1800 authorized with use of FD or AP or HUD to DA.

MALSR

MISSED APPROACH: Climb to 3500 direct KOBME and hold.

ATIS	FARGO APP CON	FARGO TOWER	GND CON	CLNC DEL
124.5 379.2	120.4 377.15	133.8 290.4	121.9 348.6	121.9 348.6

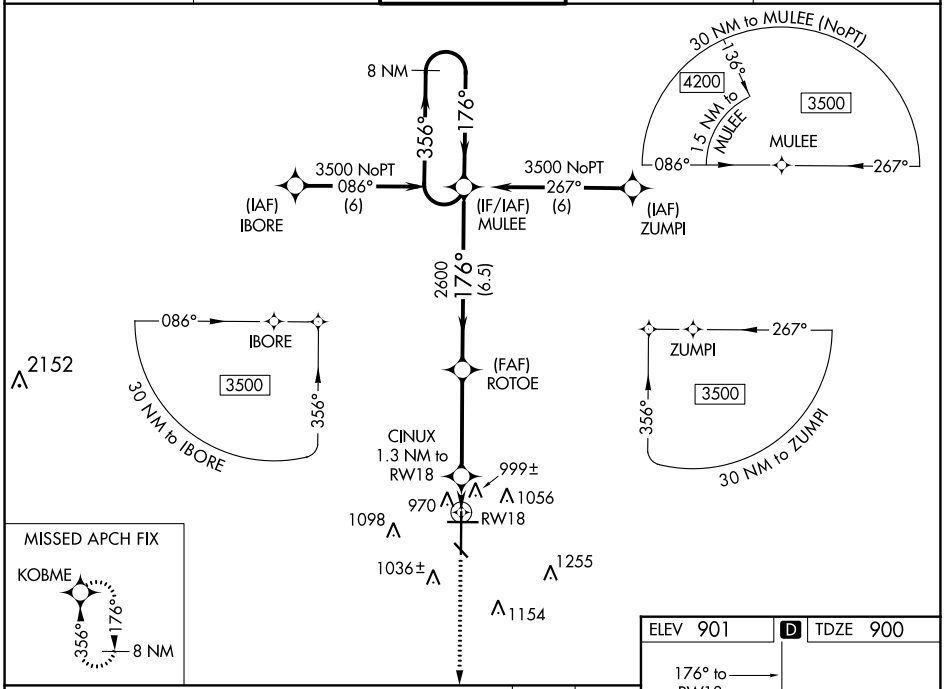

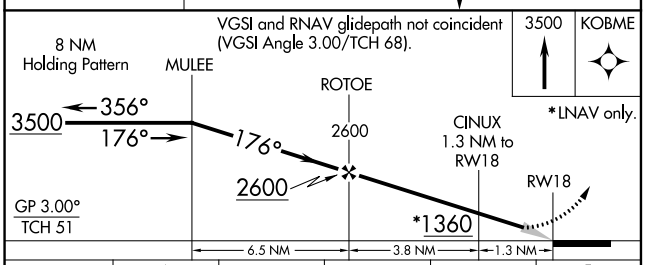

CATEGORY	A	B	C	D	E
LPV DA#	1100/24 200 (200-½)				
LNAV/VNAV DA	1272/40 372 (400-¾)				
LNAV MDA	1260/24 360 (400-½)			1260/50 360 (400-1)	
C CIRCLING	1380-1 479 (500-1)		1520-1¾ 619 (700-1¾)	1620-2¼ 719 (800-2¼)	1620-2½ 719 (700-2½)

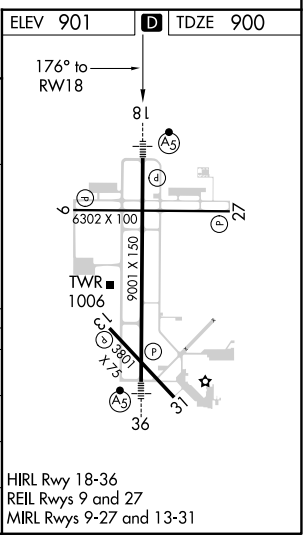

HIRL Rwy 18-36
REIL Rwys 9 and 27
MIRL Rwys 9-27 and 13-31

NC-1, 31 DEC 2020 to 28 JAN 2021
NC-1, 31 DEC 2020 to 28 JAN 2021