

WAAS

CH 66099

W31A

APP CRS

312°

Rwy Idg

TDZE

Apt Elev

7700

1679

1716

RNAV (GPS) RWY 31

MINOT INTL (MOT)

RNP APCH

V



A

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -18°C or above 54°C. For inop ALS increase LNAV/VNAV visibility to RVR 4500.

MALSR

MISSED APPROACH: Climb to 4500 direct DOYAB and hold.

ASOS	MINOT APP CON *	MAGIC CITY TOWER *	GND CON	UNICOM
118.725	119.6 363.8	118.2(CTAF) 251.125	121.9	122.95

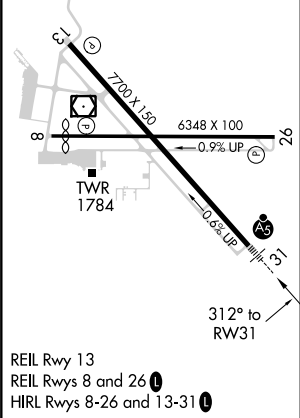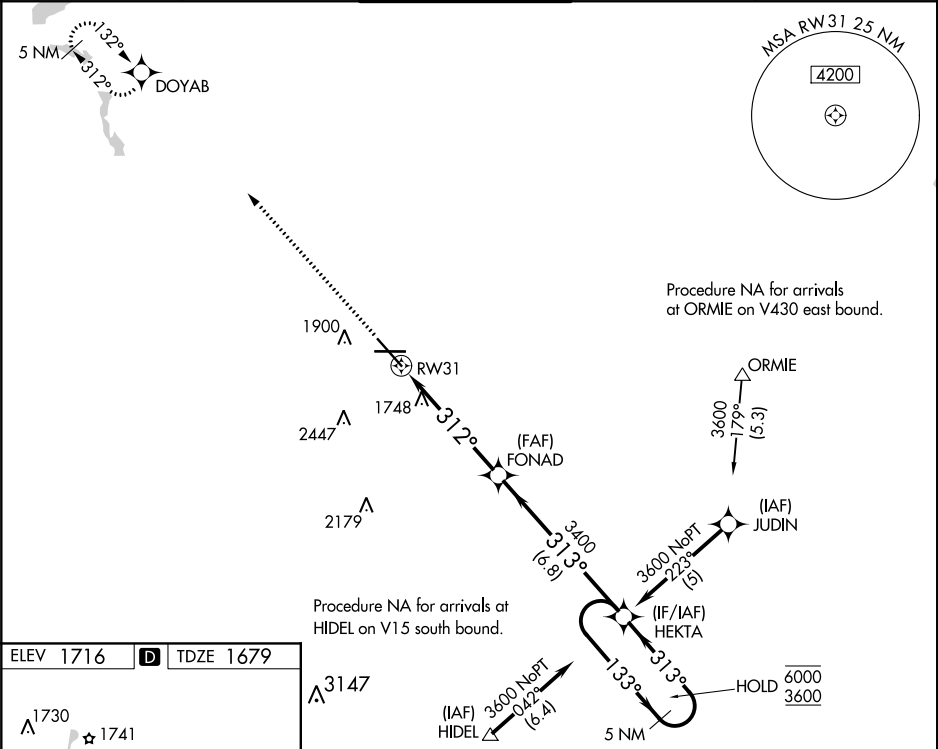

ELEV 1716	TDZE 1679
1730	1741
13	8
7700 X 150	6348 X 100
0.9% UP	0.9% UP
TWR 1784	AS
312° to RWY 31	
REIL Rwy 13	
REIL Rwy 8 and 26	
HIRL Rwy 8-26 and 13-31	

4500	DOYAB
*LNAV only	*0.9 NM to RWY 31
RWY 31	
0.9 NM	4.3 NM
6.8 NM	
3400	313°
313°	133°
6000	3600
GP 3.00°	TCH 49°

CATEGORY	A	B	C	D
LPV DA	1929/24 250 (300-½)			
LNAV/VNAV DA	1966/24 287 (300-½)			
LNAV MDA	2000/24	321 (300-½)	2000/26	2000/50
CIRCLING	2200-1	484 (500-1)	2280-1½	2280-2