

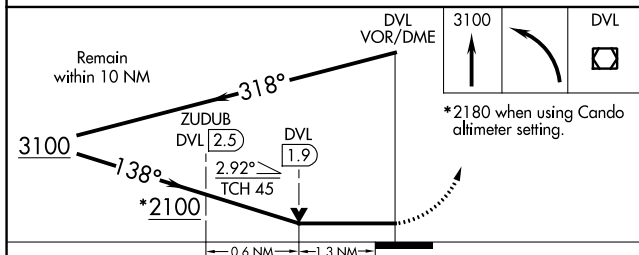
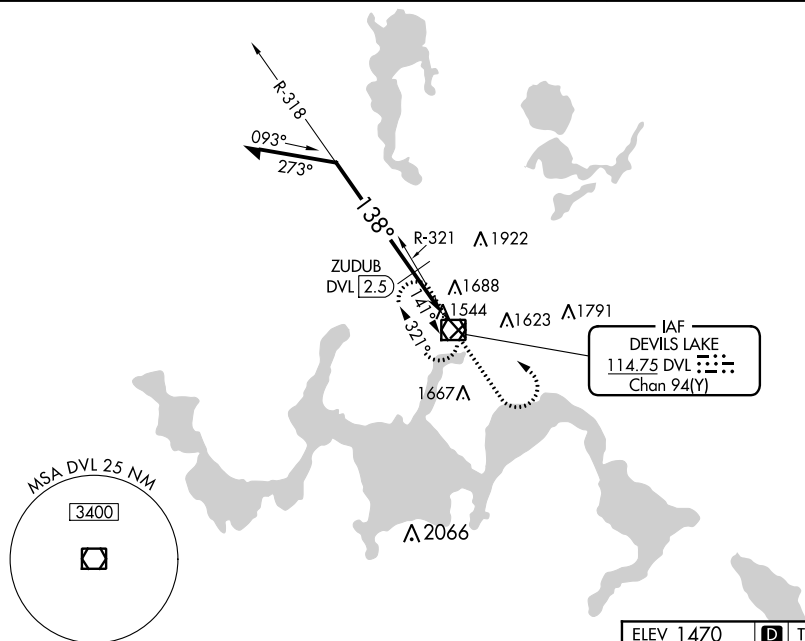
VOR/DME DVL <u>114.75</u> Chan 94(Y)	APP CRS 138°	Rwy Idg 6401 TDZE 1470 Apt Elev 1470
--	------------------------	---



VOR RWY 13
DEVILS LAKE RGNL (DVL)

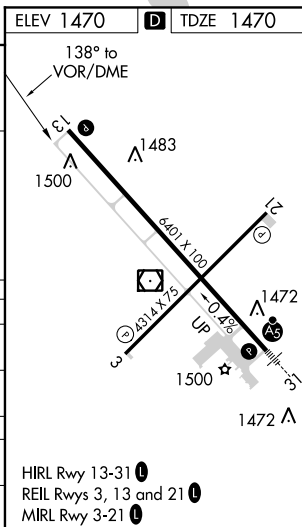
T VDP NA with Cando altimeter setting. When local altimeter setting not received, **A** use Cando altimeter setting and increase all MDA 80 feet, and increase S-13 and Circling Cats C and D visibility $\frac{1}{4}$ mile, increase ZUDUB fix minimums S-13 and Circling Cats C and D visibility $\frac{1}{4}$ mile.

MISSED APPROACH: Climb to 3100 then left turn direct DVL VOR/DME and hold.

AWOS-3PT 125.875	MINNEAPOLIS CENTER 124.2 270.3	UNICOM 122.8 (CTAF) 0
----------------------------	--	---------------------------------



CATEGORY	A	B	C	D
S-13	2100-1 630 (700-1)	2100-1 $\frac{3}{4}$ 630 (700-1 $\frac{3}{4}$)		
 CIRCLING	2100-1 630 (700-1)	2240-2 $\frac{1}{4}$ 770 (800-2 $\frac{1}{4}$)	2240-2 $\frac{1}{2}$ 770 (800-2 $\frac{1}{2}$)	
ZUDUB FIX MINIMUMS (DME REQUIRED)				
S-13	1940-1 470 (500-1)	1940-1 $\frac{3}{8}$ 470 (500-1 $\frac{3}{8}$)		
 CIRCLING	2000-1 530 (600-1)	2240-2 $\frac{1}{4}$ 770 (800-2 $\frac{1}{4}$)	2240-2 $\frac{1}{2}$ 770 (800-2 $\frac{1}{2}$)	



DEVILS LAKE RGNL (DVL)
VOR RWY 13