


WAAS CH 45933 W31A	APP CRS 315°	Rwy Idg TDZE 820 Apt Elev 820
--	------------------------	---

RNAV (GPS) RWY 31


HALLOCK MUNI (HCO)





RNP APCH. Baro-VNAV NA. VDP NA with Grafton, ND altimeter setting. When local altimeter setting not received, use Grafton, ND altimeter setting and increase all DA 63 feet and all MDA 80 feet; increase LNAV/VNAV all Cats, LNAV Cat C and Circling Cat C visibility ¼ mile.	MISSED APPROACH: Climb to 4000 direct HML VORTAC and hold, continue climb-in-hold to 4000.
---	--

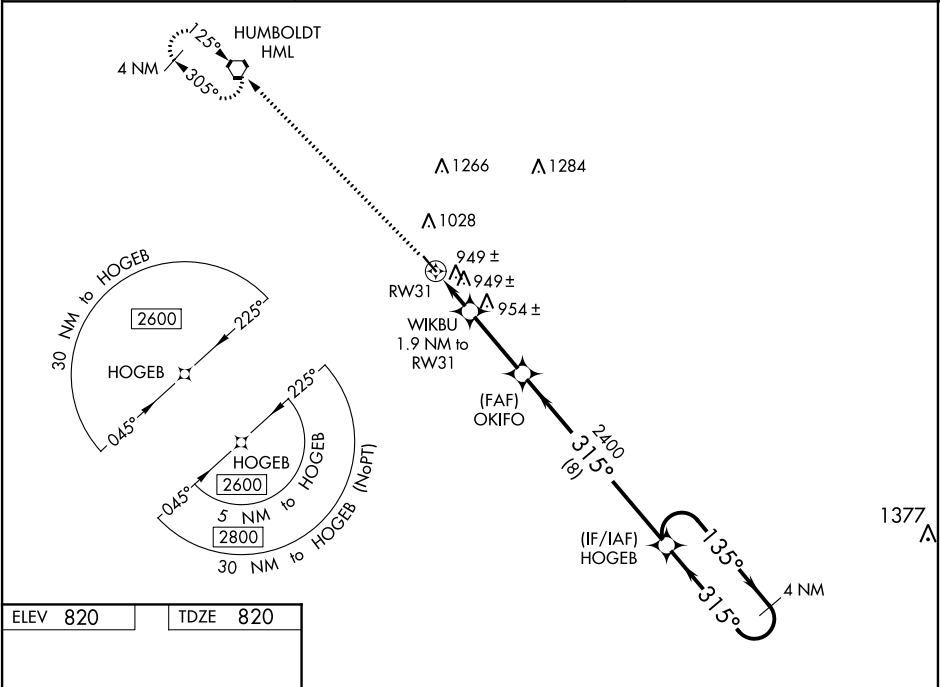AWOS-3 126.475	MINNEAPOLIS CENTER 132.15 269.6	UNICOM 122.8 (CTAF) 0
--------------------------	---	---------------------------------

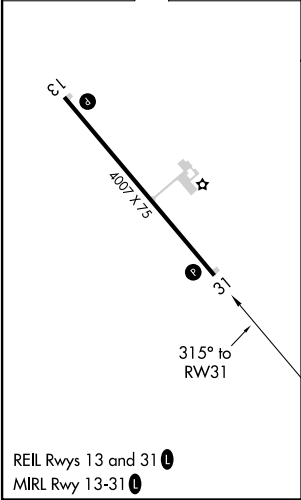

ELEV 820	TDZE 820
----------	----------

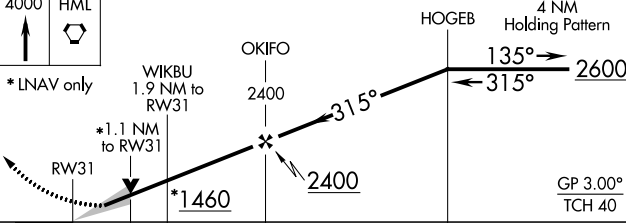

4000	HML				
					
*LNAV only					
					
CATEGORY		A	B	C	D
LPV DA		1070-1	250 (300-1)		NA
LNAV/VNAV DA		1229-1 $\frac{3}{8}$	409 (500-1 $\frac{1}{2}$)		NA
LNAV MDA		1220-1	400 (400-1)	1220-1 $\frac{1}{8}$ 400 (400-1 $\frac{1}{8}$)	NA
 CIRCLING		1380-1	560 (600-1)	1380-1 $\frac{1}{2}$ 560 (600-1 $\frac{1}{2}$)	NA