RNAV (GPS) RWY 35
HUTSON FIELD (GAF)

WAAS	APP CRS		
CH **82518**	**354°**	Rwy Idg	**3898**
W35A		TDZE	**822**
		Apt Elev	**824**

T NA For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. Visibility reduction by helicopters NA. When local altimeter setting not received, use Grand Forks Intl altimeter setting and increase all DA 69 feet and all MDA 80 feet. Increase LPV and LNAV/VNAV all Cats and LNAV Cat C visibility ¼ mile. Baro-VNAV NA when using Grand Forks Intl altimeter setting.

MISSED APPROACH: Climb to 4000 direct OHUTO and hold, continue climb-in-hold to 4000.

AWOS-3	GRAND FORKS APP CON	UNICOM
118.625	**118.1 318.1**	**122.8** (CTAF) L

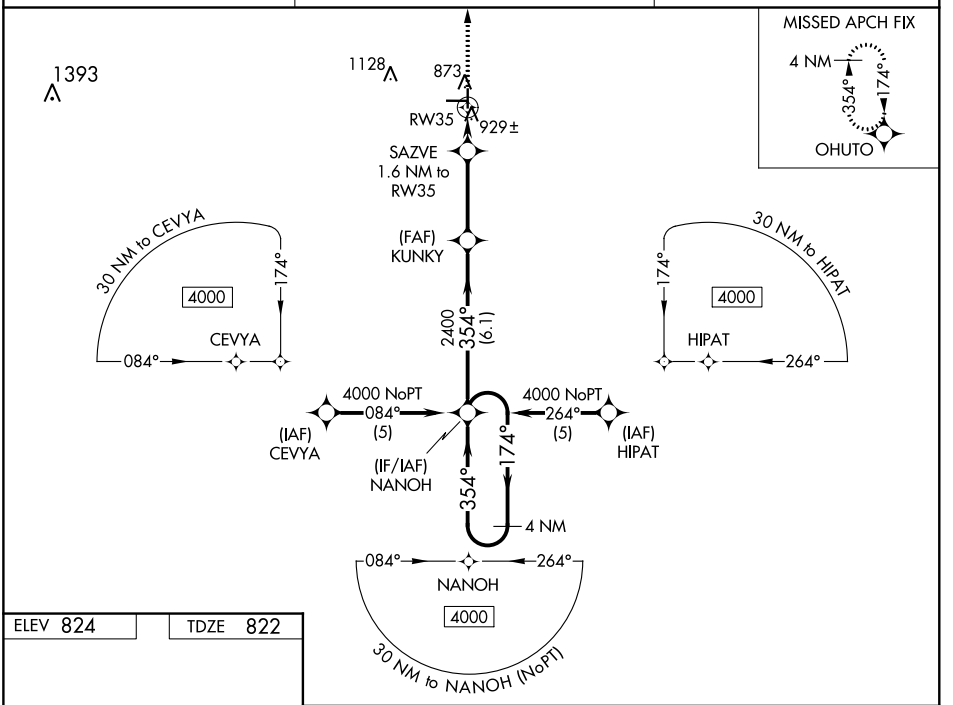

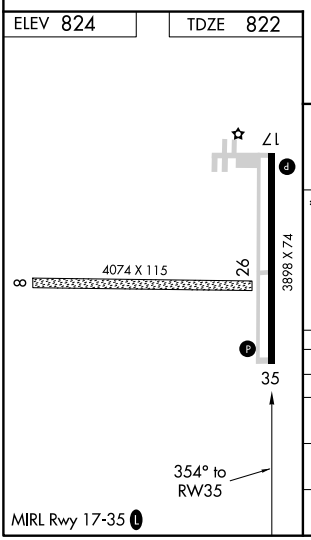

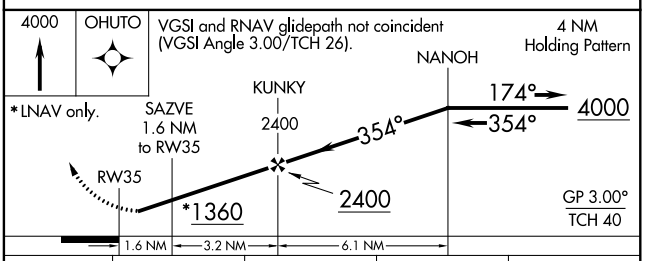

CATEGORY	A	B	C	D
LPV DA	1072-1	250 (300-1)		NA
LNAV/VNAV DA	1199-1¼	377 (400-1¼)		NA
LNAV MDA	1180-1	358 (400-1)		NA
CIRCLING	1340-1	516 (600-1)	1340-1½ 516 (600-1½)	NA

NC-1, 31 DEC 2020 to 28 JAN 2021
NC-1, 31 DEC 2020 to 28 JAN 2021