

WAAS CH 86607 W35A	APP CRS 353°	Rwy Idg TDZE Apt Elev	5500 1953 1953
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 35



PRATT RGNL (P'TT)

⚠

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -18°C (0°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. When local altimeter setting not received use Great Bend altimeter setting and increase all DA/MDA 100 feet and LPV visibility ¼ mile all Cats, LNAV/VNAV visibility ½ mile all Cats and LNAV Cat C visibility ¼ mile. Baro-VNAV and VDP NA when using Great Bend altimeter setting.

MISSED APPROACH: Climb to 4300 direct ORLE and hold.

AWOS-3PT 118.725	KANSAS CITY CENTER 118.8 322.425	UNICOM 122.8 (CTAF) 0
----------------------------	--	---------------------------------

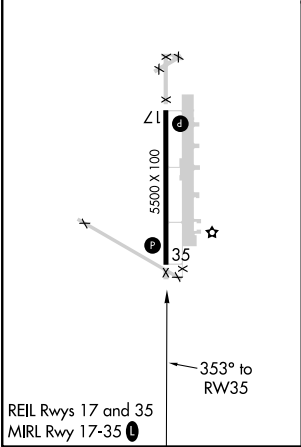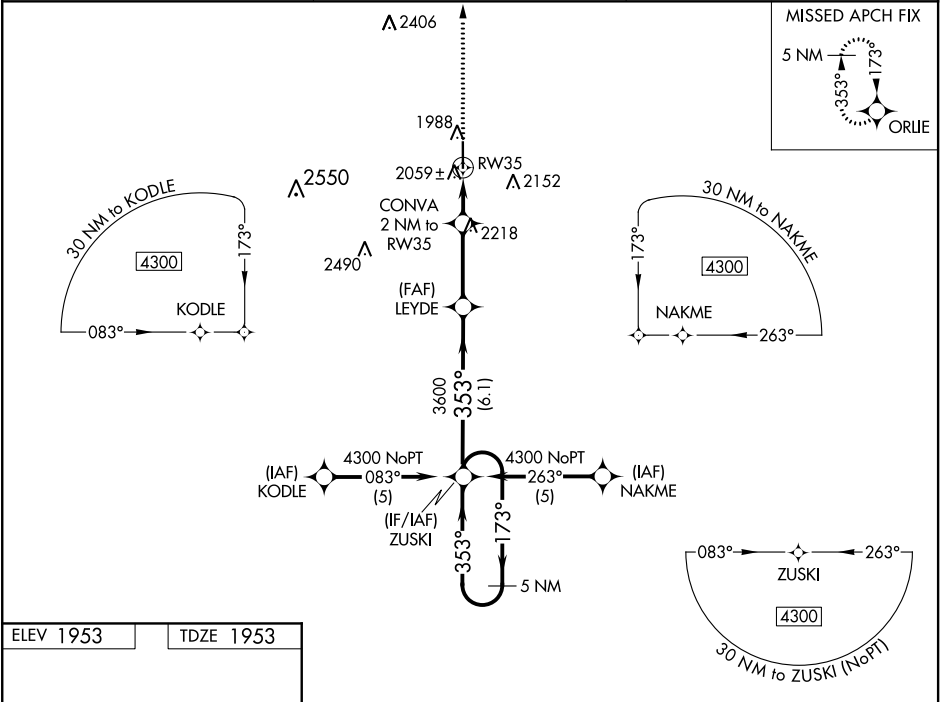

4300	ORLE	CONVA 2 NM to RW35	LEYDE	ZUSKI 5 NM Holding Pattern	4300
*LNAV only.		*1.1 NM to RW35			
		2620*	3600		GP 3.00° TCH 40
	1.1 NM	0.9 NM	3 NM	6.1 NM	
CATEGORY	A	B	C	D	
LPV DA	2203-1	250 (300-1)		NA	
LNAV/VNAV DA	2329-1¼	376 (400-1¼)		NA	
LNAV MDA	2320-1	367 (400-1)		NA	
CIRCLING	2380-1 427 (500-1)	2420-1 467 (500-1)	2420-1½ 467 (500-1½)	NA	