

|             |         |          |      |
|-------------|---------|----------|------|
| VOR/DME ANW | APP CRS | Rwy Idg  | 6824 |
| 112.7       | 008°    | TDZE     | 2589 |
| Chan 74     |         | Apt Elev | 2589 |

VOR RWY 35

AINSWORTH RGNL (ANW)


When local altimeter setting not received, procedure NA.

For inoperative ALS, increase BIYAG fix minimums S-35 Cat D visibility to 1¼.

MALSR

MISSED APPROACH: Climb to 3500 then climbing left turn to 6000 direct ANW VOR/DME and hold.

|                   |                               |                          |
|-------------------|-------------------------------|--------------------------|
| AWOS-3<br>118,325 | DENVER CENTER<br>127.95 338.2 | UNICOM<br>122.8 (CTAF) 0 |
|-------------------|-------------------------------|--------------------------|

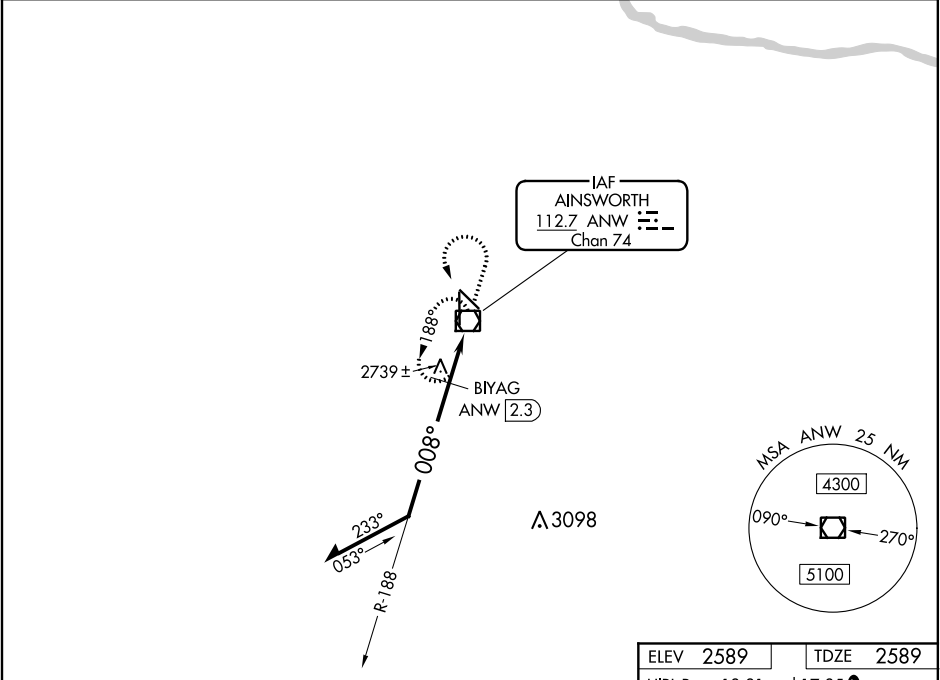

|                                   |             |                  |              |              |        |
|-----------------------------------|-------------|------------------|--------------|--------------|--------|
| Remain within 10 NM               |             | ANW VOR/DME 6000 | 3500         | 6000         | ANW    |
| 4500                              |             | BIYAG ANW 2.3    | ANW 1.3      | 2.99°        | TCH 45 |
| 3300                              |             | 1 NM             | 1.2 NM       |              |        |
| CATEGORY                          | A           | B                | C            | D            |        |
| S-35                              | 3300-½      | 711 (800-½)      | 3300-1½      | 3300-1¾      |        |
|                                   |             |                  | 711 (800-1½) | 711 (800-1¾) |        |
| CIRCLING                          | 3300-1      | 711 (800-1)      | 3300-2       | 3300-2¼      |        |
|                                   |             |                  | 711 (800-2)  | 711 (800-2¼) |        |
| BIYAG FIX MINIMUMS (DME REQUIRED) |             |                  |              |              |        |
| S-35                              | 3000-½      | 411 (500-½)      | 3000-¾       | 3000-1       |        |
|                                   |             |                  | 411 (500-¾)  | 411 (500-1)  |        |
| CIRCLING                          | 3000-1      | 3040-1           | 3040-1½      | 3200-2       |        |
|                                   | 411 (500-1) | 451 (500-1)      | 451 (500-1½) | 611 (700-2)  |        |

