

WAAS CH 86301 W17A	APP CRS 169°	Rwy Idg 5898 TDZE 1665 Apt Elev 1670
----------------------------------------	------------------------	-----------------------------------------------------------------


RNAV (GPS) RWY 17

YORK MUNI (JYR)

⚠ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -18°C (0°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. Visibility reduction by helicopters NA. When local altimeter setting not received, use Aurora altimeter setting and increase all DA/MDA 60 feet and all LPV and LNAV/VNAV visibility ¼ mile. VDP and Baro-VNAV NA when using Aurora altimeter setting.

MISSED APPROACH:
Climb to 4000 direct WIVFO and hold.

AWOS-3 124.175	MINNEAPOLIS CENTER 119.4 278.8	UNICOM 122.8 (CTAF) Ⓛ
--------------------------	------------------------------------------	---------------------------------

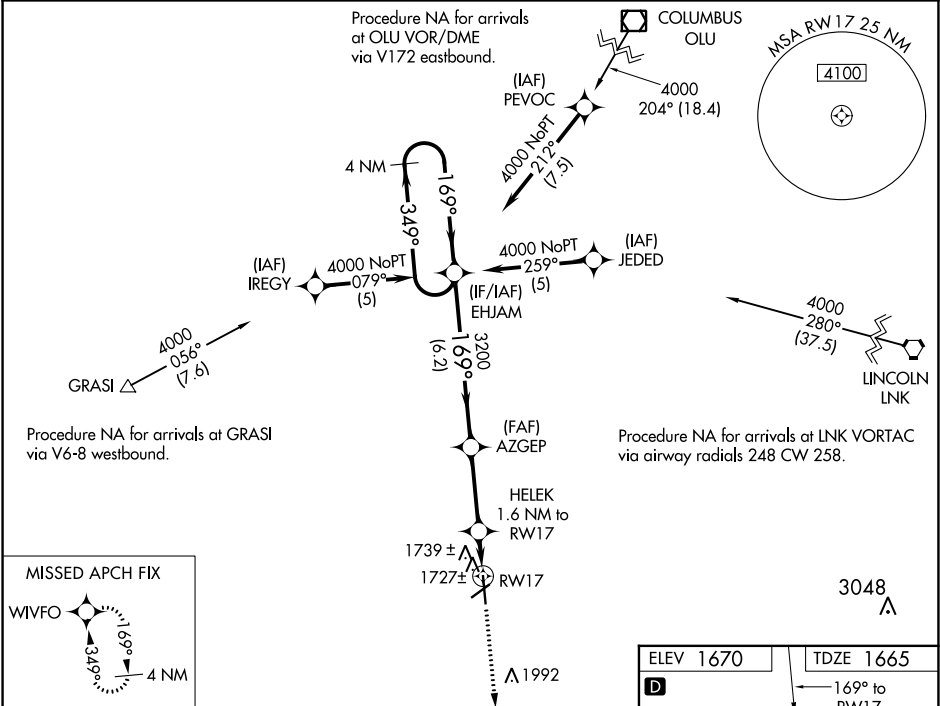

4 NM Holding Pattern		EHJAM	AZGEP	HELEK 1.6 NM to RW17	4000 WIVFO
4000		← 349°	→ 169°	→ 169°	
GP 3.00° TCH 44			3200	*2220	
		6.2 NM	3 NM	0.7 NM	0.9 NM
CATEGORY	A	B	C	D	
LPV DA	1915-¾ 250 (300-¾)			NA	
LNAV/VNAV DA	2031-1¼ 366 (400-1¼)			NA	
LNAV MDA	2000-1 335 (400-1)			NA	
CIRCLING	2060-1 390 (400-1)	2120-1 450 (500-1)	2120-1½ 450 (500-1½)	NA	

