


APP CRS	Rwy Idg	10818
303°	TDZE	583
	Apt Elev	618

RNAV (RNP) Z RWY 30L

ST LOUIS LAMBERT INTL (STL)

RNP AR APCH.	MALSR	MISSED APPROACH: Climb to 3000 direct TUDNE and hold, continue climb-in-hold to 3000.
▼ Use of FD or AP required during simultaneous operations. Simultaneous approach authorized with Rwy 29, except for arrivals at JYAAR and PEJAA. For uncompensated Baro-VNAV systems, procedure NA below -18°C or above 54°C. For inop ALS, increase RNP 0.15 all Cats visibility to RVR 5500 and RNP 0.30 all Cats visibility to RVR 6000.		

D-ATIS	ST. LOUIS APP CON	ST. LOUIS TOWER	GND CON	CLNC DEL	CPDLC
125.025 379.925	132.125 360.6	118.5 257.7	121.9 348.6 (Inbound) 121.65 377.175 (Outbound) 118.925 227.125 (Rwy 11/29)	119.5 363.1	

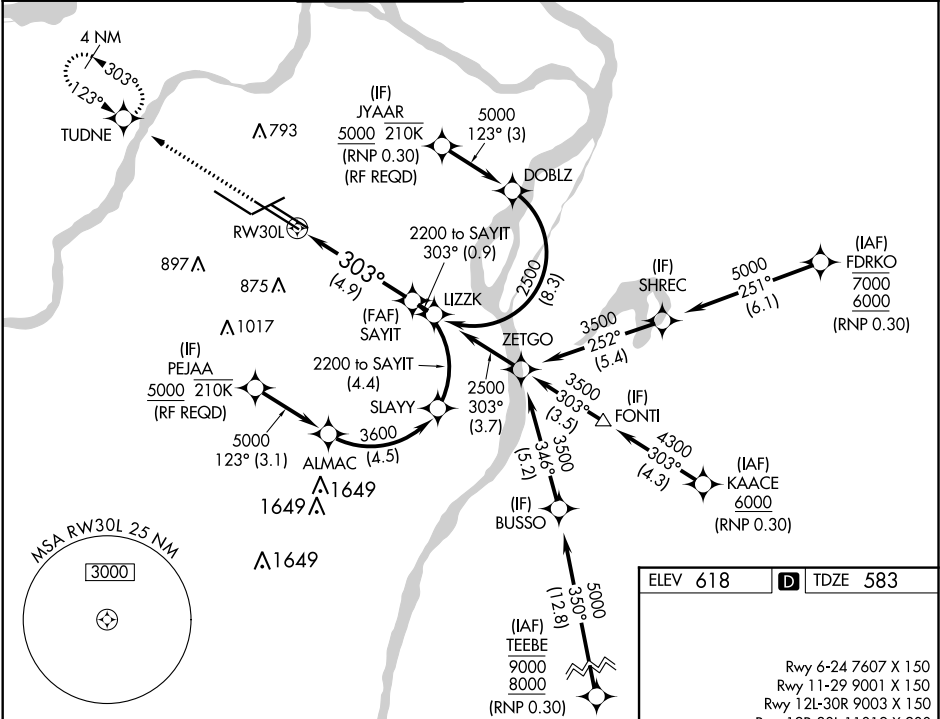

3000	TUDNE	See planview for multiple IF locations.		SAYIT
				2200
				GP 3.00° TCH 58
CATEGORY	A	B	C	D
RNP 0.15 DA	947/35 364 (400-5%)			
RNP 0.30 DA	998/40 415 (400-3/4)			
AUTHORIZATION REQUIRED				

