APP CRS	Rwy Idg	9500
011°	TDZE	1017
	Apt Elev	1026

RNAV (RNP) Z RWY 1R

KANSAS CITY INTL (MCI)

For uncompensated Baro-VNAV systems, procedure NA below -20°C (-4°F) or above 54°C (130°F). For inop ALSF, increase RNP 0.30 visibility to RVR 5000. GPS required. Simultaneous approach authorized with Rwy 1L, except for arrivals at BYGEC, COOKD, BAUNR, and ELTNN. Use of FD or AP providing RNAV track guidance required during simultaneous operations.

ALSF-2

MISSED APPROACH: Climb to 1500 then climbing right turn to 4000 direct ANX VORTAC and hold.

D-ATIS	KANSAS CITY APP CON	INTERNATIONAL TOWER	GND CON	CLNC DEL	CPDLC
128.375	120.95 318.1	128.2 254.25	121.8	135.7	

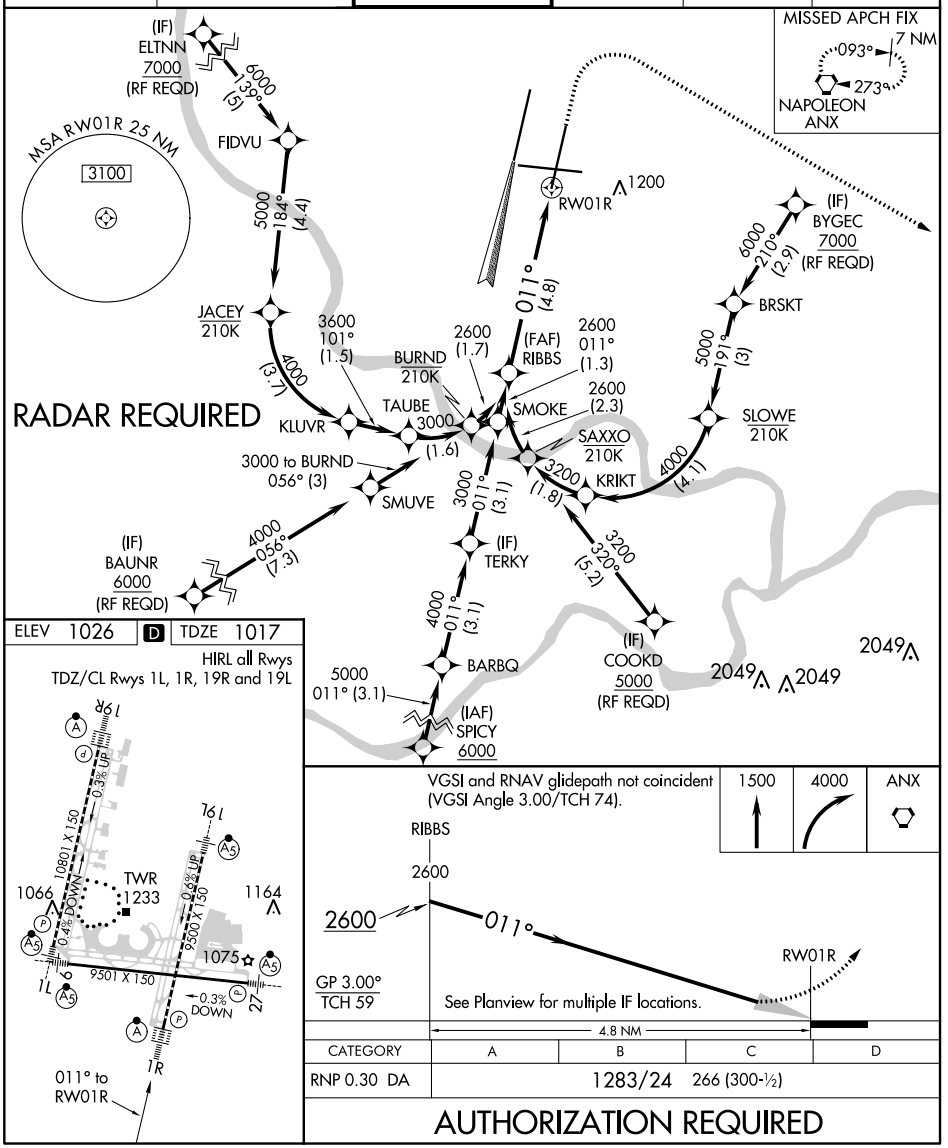

CATEGORY	A	B	C	D
RNP 0.30 DA	1283/24		266 (300-½)	

AUTHORIZATION REQUIRED

NC-3, 31 DEC 2020 to 28 JAN 2021
NC-3, 31 DEC 2020 to 28 JAN 2021