WAAS CH 49130 W31A	APP CRS 315°	Rwy Idg 5506 TDZE 1203 Apt Elev 1204

RNAV (GPS) RWY 31
ARTHUR N NEU (CIN)

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C (2°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. Baro-VNAV and VDP NA when using Audubon altimeter setting. When local altimeter setting not received, use Audubon altimeter setting and increase all DA 62 feet and all MDA 80 feet and increase LNAV Cat C visibility ⅛ mile.

MISSED APPROACH: Climb to 3000 direct AMABE and hold.

AWOS-3	MINNEAPOLIS CENTER	UNICOM
118.025	134.0 288.3	122.8 (CTAF) L

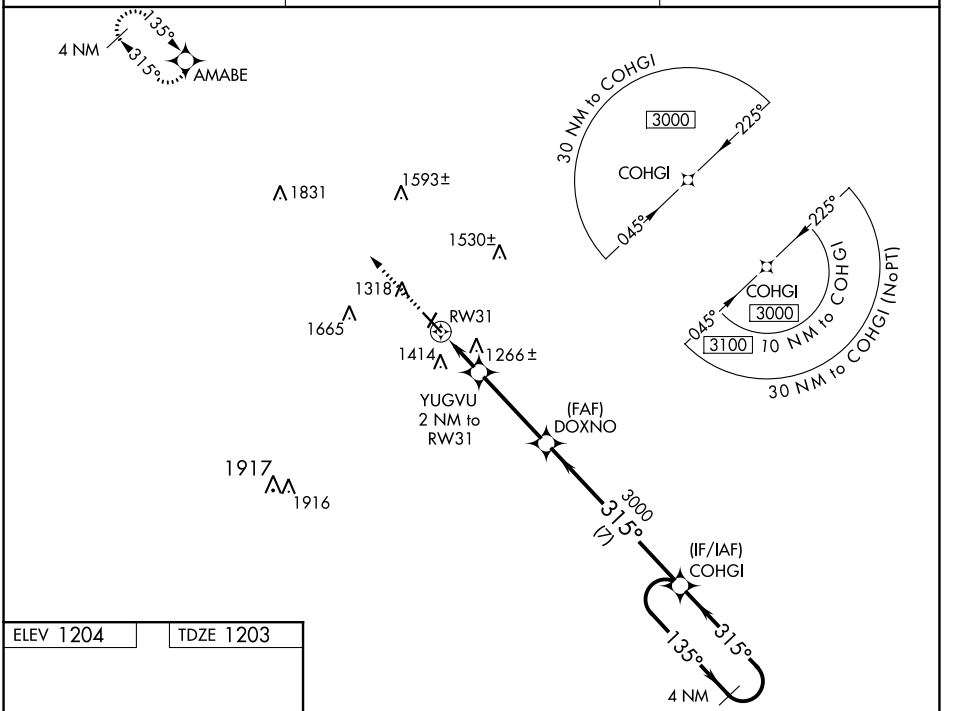

ELEV 1204 | TDZE 1203

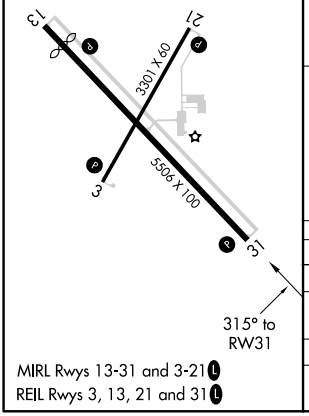

MIRL Rwys 13-31 and 3-21 L
REIL Rwys 3, 13, 21 and 31 L

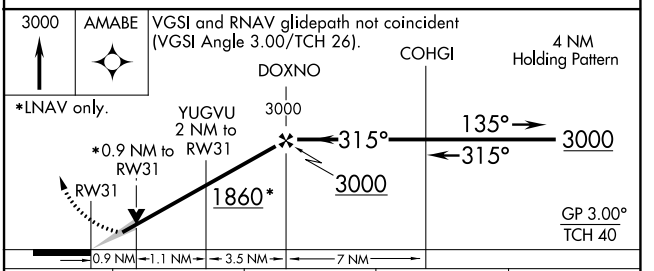

CATEGORY	A	B	C	D
LPV DA	1453-1 250 (300-1)			NA
LNAV/VNAV DA	1453-1 250 (300-1)			NA
LNAV MDA	1520-1 317 (400-1)			NA
CIRCLING	1720-1 516 (600-1)		1720-1½ 516 (600-1½)	NA

NC-3, 31 DEC 2020 to 28 JAN 2021
NC-3, 31 DEC 2020 to 28 JAN 2021