


WAAS CH <b>86517</b> <b>W34A</b>	APP CRS <b>338°</b>	Rwy Idg TDZE <b>1023</b> Apt Elev <b>1023</b>
--	------------------------	---

RNAV (GPS) RWY 34  
CENTERVILLE MUNI (TVK)

⚠ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C (2°F) or above 46°C (114°F).  
DME/DME RNP-0.3 NA. Baro-VNAV and VDP NA when using Chariton altimeter setting. When local  
altimeter setting not received, use Chariton altimeter setting and increase all DA 71 feet and all MDA 80  
feet. Increase LPV and LNAV/VNAV all Cats visibility ¼ SM.

MISSED APPROACH:  
Climb to 3000 direct  
EJKAX and hold.

AWOS-3 <b>123.775</b>	CHICAGO CENTER <b>118.15 335.575</b>	UNICOM <b>122.8 (CTAF) 0</b>
--------------------------	---	---------------------------------

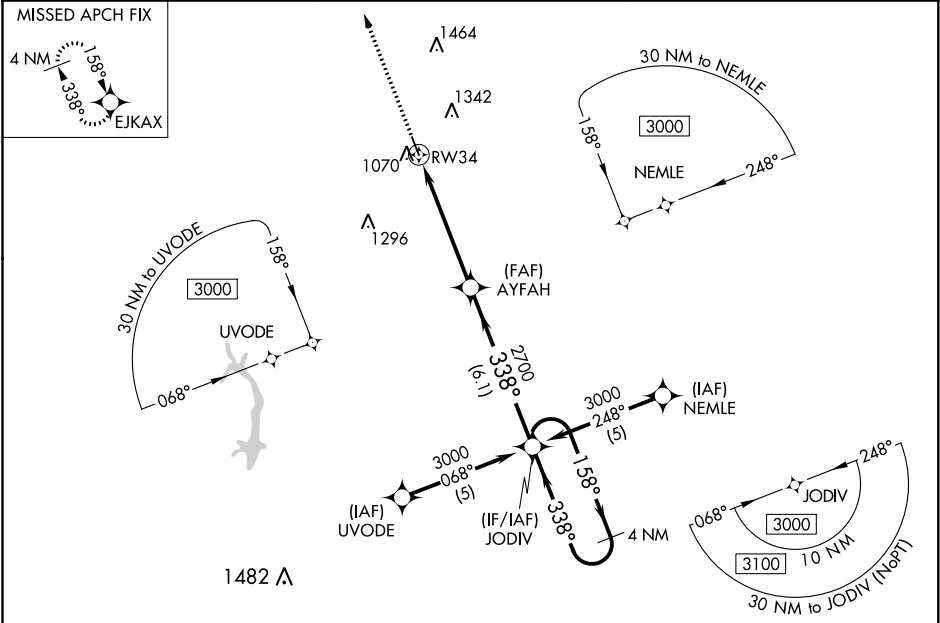

3000 EJKAX

\* LNAV only

\* 0.9 NM to RW34

RW34

AYFAH 2700

JODIV 4 NM Holding Pattern

338° 158° 3000

GP 3.00° TCH 40

0.9 NM 4.2 NM 6.1 NM

CATEGORY	A	B	C	D
LPV DA	1273-1	250 (300-1)		NA
LNAV/VNAV DA	1349-1¼	326 (400-1¼)		NA
LNAV MDA	1500-1	477 (500-1)		NA
CIRCLING	1500-1	477 (500-1)		NA

