


VORTAC ENE	APP CRS	Rwy Idg	6001
117.1	261°	TDZE	235
Chan 118		Apt Elev	244

VOR RWY 25  
SANFORD SEACOAST RGNL (SFM)

<p>⚠ Inoperative table does not apply to S-25 Cats A/B. For inoperative ODALS, increase S-25 Cats C/D visibility to 1 1/8. When local altimeter setting not received, use Rochester, NH altimeter setting increase all MDA 40 feet, S-25 Cats C/D visibility 1/8 SM, and Circling Cat C visibility 1/4 SM; for inop ODALS, increase S-25 Cats C/D visibility to 1 3/8. Rwy 25 helicopter visibility reduction below 3/4 SM NA. Rwy 32 helicopter visibility reduction below 1 SM NA.</p>	<p>ODALS</p> <p>⬇</p>	<p>MISSED APPROACH:</p> <p>⬆</p> <p>Climb to 800 then climbing left turn to 2000 direct ENE VOR/DME and hold.</p>
------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------	-----------------------	-------------------------------------------------------------------------------------------------------------------

AWOS-3PT 120.025	PORTLAND APP CON ★ 119.75 269.35	CLNC DEL 121.725	UNICOM 123.075 (CTAF) 0
---------------------	-------------------------------------	---------------------	----------------------------

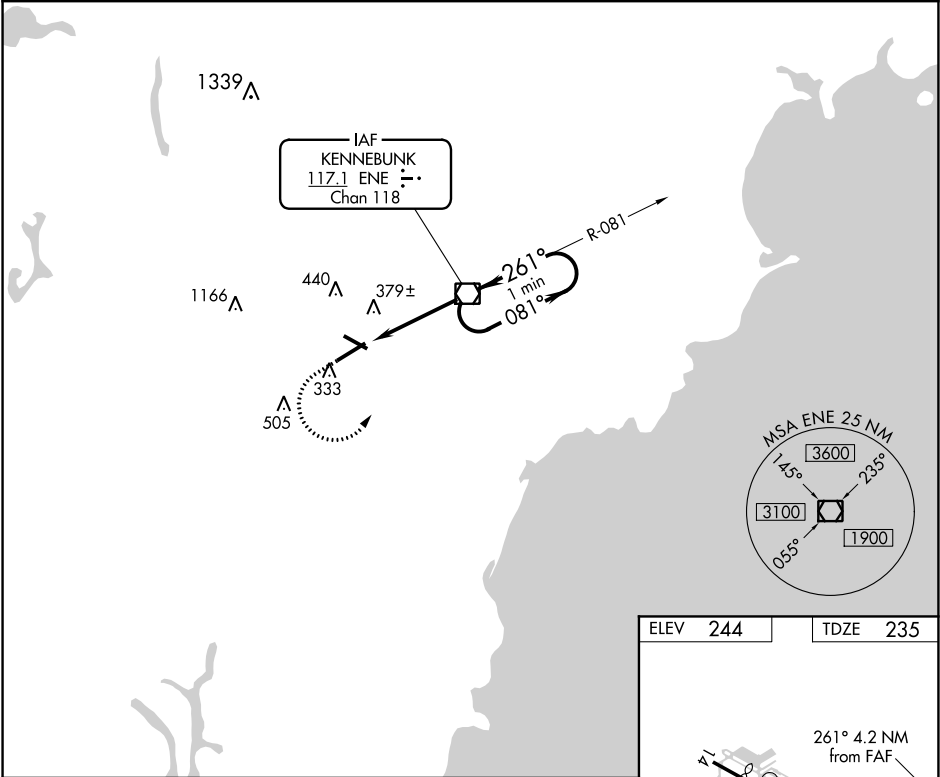

800	2000	ENE	ENE VOR/DME	One Minute Holding Pattern
↑	↶	☐		
		ENE 3.1	ENE 261°	2000
		ENE 4.2	261°	1700
		1.1	3.17°	TCH 47
		1.1	3.1 NM	
CATEGORY	A	B	C	D
S-25	640-1	405 (400-1)		
CIRCLING	760-1	516 (600-1)	1180-2 3/4 936 (1000-2 3/4)	1240-3 996 (1000-3)

ELEV 244	TDZE 235
REIL Rwy 7 0	
HIRL Rwy 7-25 0	
MIRL Rwy 14-32 0	
FAF to MAP 4.2 NM	
Knots	60 90 120 150 180
Min:Sec	4:12 2:48 2:06 1:41 1:24

NE-1, 31 DEC 2020 to 28 JAN 2021

NE-1, 31 DEC 2020 to 28 JAN 2021