

WAAS
CH **45602**
W21B

APP CRS
210°

Rwy ldg
TDZE
626
Apt Elev
640

RNAV (GPS) Z RWY 21

CHARLOTTEVILLE-ALBEMARLE (CHO)

RNP APCH.

▼


Baro-VNAV NA when using Staunton/Waynesboro/Harrisonburg altimeter setting. For uncompensated Baro-VNAV systems, procedure NA below -16°C or above 54°C.

▲

When local altimeter setting not received, use Staunton/Waynesboro/Harrisonburg altimeter setting and increase all DA 130 feet and LPV visibility ½ mile.

MISSED APPROACH: Climb to 1100, then climbing left turn to 4000 direct GVE VORTAC and hold.

ATIS 118.425	POTOMAC APP CON 132.85 323.125	CHARLOTTEVILLE TOWER ★ 124.5 (CTAF) 0 338.275	GND CON 121.9 338.275	UNICOM 122.95
------------------------	--	---	---------------------------------	-------------------------

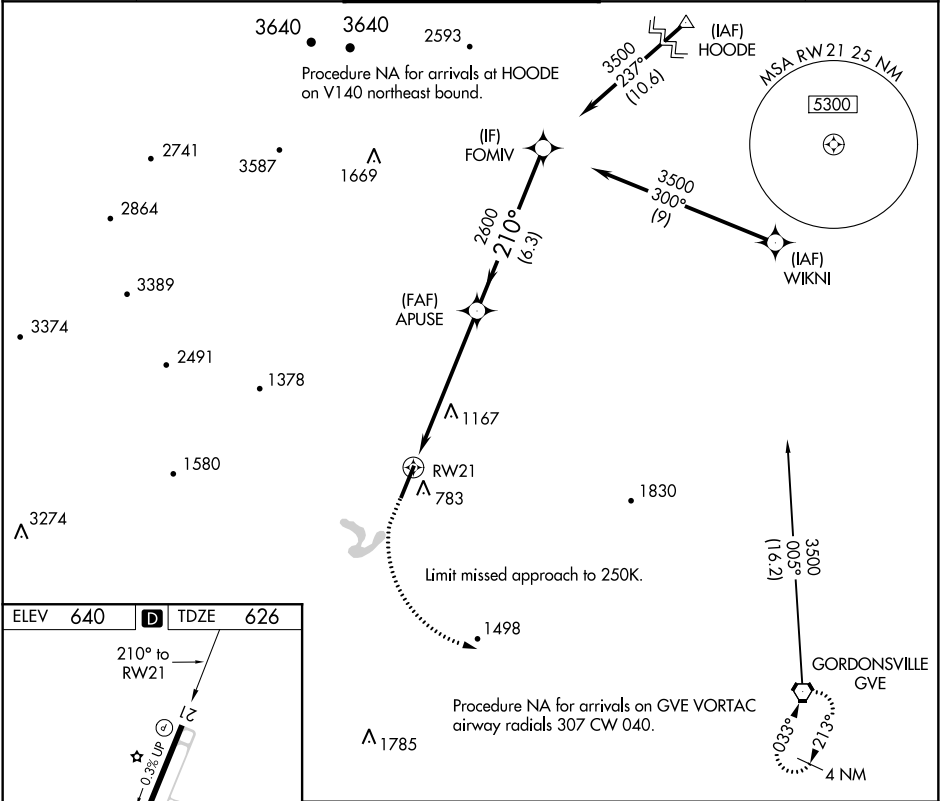

ELEV 640

D

TDZE 626

210° to RWY 21

680 ft x 150

0.3% Up

TWR 685

HIRL Rwy 3-21

REIL Rwy 21

1100

4000

GVE

RWY 21

APUSE 2600

FOMIV 3500

GP 3.00° TCH 50

6.1 NM

6.3 NM

CATEGORY	A	B	C	D
LPV DA	826-1 200 (200-1)			
LNNAV/VNAV DA	1588-4 962 (1000-4)			