RNAV (GPS) RWY 33

RICHMOND EXECUTIVE-CHESTERFIELD COUNTY (FCI)

WAAS	APP CRS	Rwy Idg	5500
CH 56221	331°	TDZE	217
W33A		Apt Elev	236

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 54°C (130°F). When local altimeter setting not received, use Richmond Intl altimeter setting and increase all DA 36 feet and all MDA 40 feet; increase LPV and LNAV/VNAV all Cats and LNAV Cats C/D and Circling Cat C visibility ⅛ mile. DME/DME RNP-0.3 NA. For inop MALSR, increase LPV all Cats visibility to 1 mile and LNAV Cat C/D to 1⅜ mile. For inop MALSR when using Richmond Intl altimeter setting, increase LPV all Cats visibility to 1⅛ mile. Baro-VNAV and VDP NA when using Richmond Intl altimeter setting.

NA

MALSR

MISSED APPROACH: Climb to 3000 direct DOCEV and hold.

AWOS-3PT	POTOMAC APP CON	CLNC DEL	UNICOM
128.625	126.75 307.2	124.6	123.05 (CTAF)

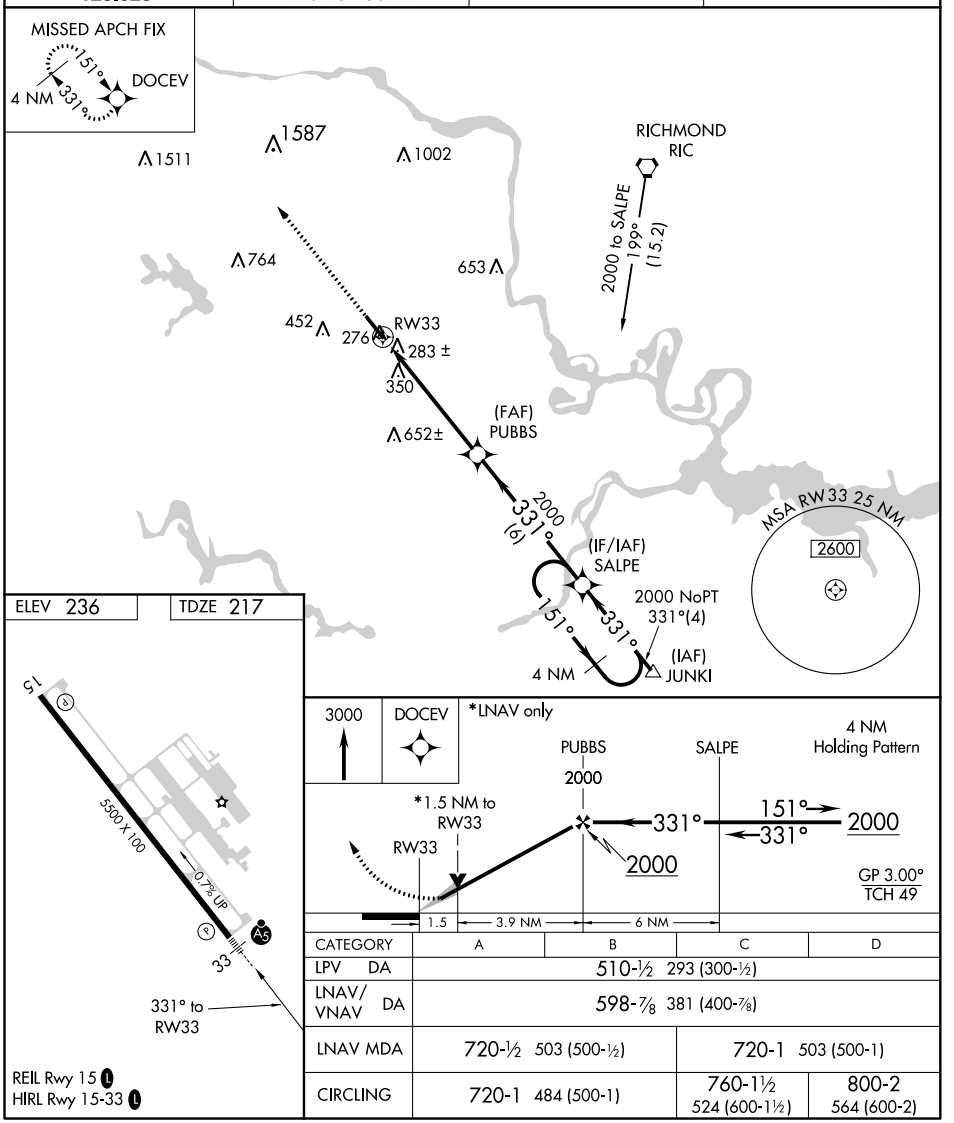

CATEGORY	A	B	C	D
LPV DA	510-½ 293 (300-½)			
LNAV/VNAV DA	598-⅞ 381 (400-⅞)			
LNAV MDA	720-½ 503 (500-½)		720-1 503 (500-1)	
CIRCLING	720-1 484 (500-1)		760-1½ 524 (600-1½)	800-2 564 (600-2)

NE-3, 31 DEC 2020 to 28 JAN 2021