RNAV (RNP) Z RWY 28C

PITTSBURGH INTL (PIT)

APP CRS	Rwy Idg	9708
281°	TDZE	1134
	Apt Elev	1203

For uncompensated Baro-VNAV systems procedure NA below -17°C (1°F) or above 46°C (116°F). GPS Required. Rwy 28C helicopter visibility reduction below RVR 4000 NA. Simultaneous approach authorized with ILS or LOC Rwy 28R, ILS Rwy 28R (Cat II). Use of FD or AP providing RNAV track guidance required during simultaneous operations.

MISSED APPROACH: Climb to 4000 on track 281° to EPONE on track 251° to JAKNO and on track 210° to HLG VOR/DME and hold.

D-ATIS	PITTSBURGH APP CON	PITTSBURGH TOWER	GND CON	CLNC DEL
ARR 127.25	123.95 360.8	128.3 291.7	SOUTH 121.9 348.6	126.75 353.7
DEP 135.9			NORTH 127.8 348.6	

CPDLC

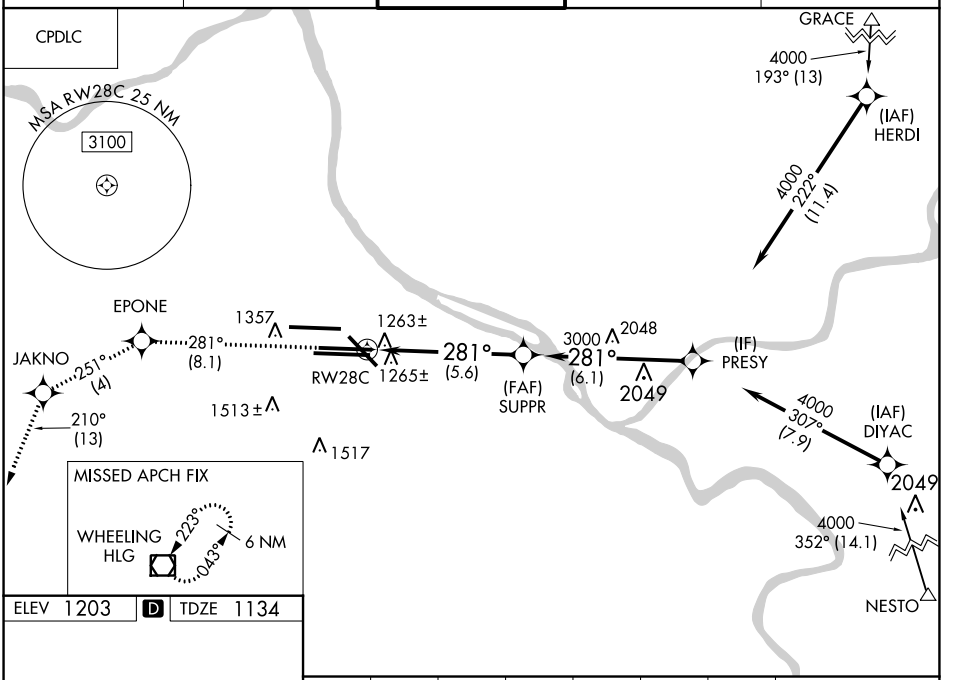

ELEV 1203 D TDZE 1134



REIL Rwy 10C
HIRL all Rwys
TDZ/CL Rwys 10L, 10R, 28L, 28R, 28C, and 32

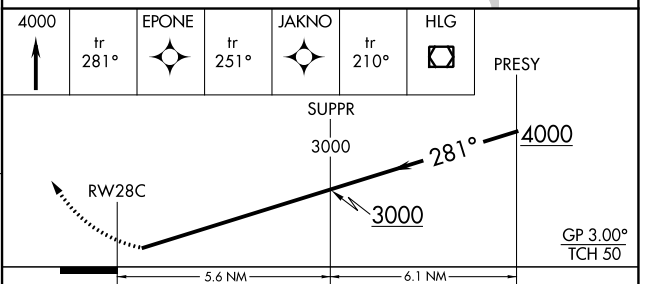

CATEGORY	A	B	C	D
RNP 0.14 DA		1527/60	393 (400-1¼)	
RNP 0.16 DA		1531-1½	397 (400-1½)	
RNP 0.30 DA		1576-1½	442 (400-1½)	

AUTHORIZATION REQUIRED

NE-4, 31 DEC 2020 to 28 JAN 2021
NE-4, 31 DEC 2020 to 28 JAN 2021